



DOUBLE3GON ACTION


per lavorazioni affidabili ed economiche



inserti a 6 taglienti
affidabili ed economici

SC: Sharp
GP: General
Te: Reinforced
AL: Aluminium
RE 0.4-0.8-1.2

4 rompitruccioli e
3 raggi disponibili



ampia selezione di
gradi e rivestimenti

Acquista 30 inserti e ottieni il corpo fresa allo sconto speciale del 60%

Inserti: WNEX04
Corpi fresa: NT-WX04H

Inserti: WNEX08
Corpi fresa: NT-WX08H

nixkoTOOLS

uemme
TOOLS and EQUIPMENT

scadenza: 31/12/2025

DOUBLE3GON

High economical trigonal shoulder milling system for universal processes

APPLICATION


- Shoulder milling
- Shoulders with repeated passes
- Long overhang shoulder milling

ISO APPLICATION FIELDS

P M K N S



ADVANTAGES AND CHARACTERISTICS

- High precision in making 90° side milling
- Reduced cost per edge than conventional shoulder milling systems.
- Very robust system because of the negative trigonal and reliable installation.
- Full range of carbide geometries, radii and grades.
- «Ultra-precise» cutter bodies with special surface treatment to ensure longer life.

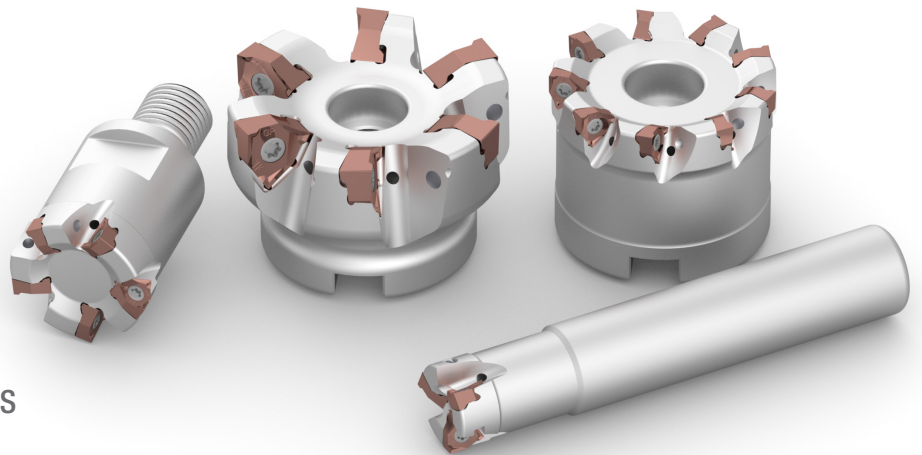


• Cutter bodies

- Arbor type
- Cylindrical type
- Screw-in type
- Extension sleeves (steel/carbide 10xD)
- From D20 to D160



• Inserts

- 6 cutting edges
- Edge length 04 and 08
- Cemented carbide grades with CVD and PVD coatings
- Geometries: SC, GP, TE, AL





NT-WX



Double3Gon

- Double sided trigonal type shoulder milling system, with coolant through
- Tolerance of tool diameter (with Nikko inserts installed) 0/-0.2
- Steel and carbide arbors available for screw-in type holders
- High-Quality Swiss screws guarantee more reliability in your machining



Screw-in



Cylindrical

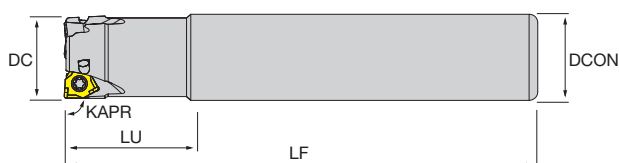

Arbor

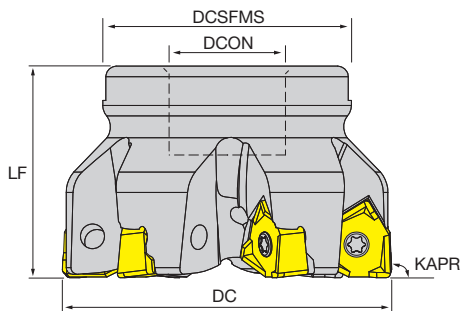

Designation	Stock	DC	CICT	DCON	LF	LU	DCSFMS	CRKS	KAPR	WT	MIID
SCREW-IN											
NT-WX04H D020-M10-Z03	●	20	3	10.5	28	-	-	M10	90°	0.05 Kg	WNEX0403
NT-WX04H D025-M12-Z03	○	25	3	12.5	30	-	-	M12	90°	-	WNEX0403
NT-WX04H D025-M12-Z04	●	25	4	12.5	30	-	-	M12	90°	0.09 Kg	WNEX0403
NT-WX04H D032-M16-Z04	○	32	4	17	40	-	-	M16	90°	-	WNEX0403
NT-WX04H D032-M16-Z05	●	32	5	17	40	-	-	M16	90°	0.20 Kg	WNEX0403
CYLINDRICAL											
NT-WX04H D020-S16-Z03	●	20	3	16	110	20	-	-	90°	0.16 Kg	WNEX0403
NT-WX04H D020-S20-Z03	●	20	3	20	110	28	-	-	90°	0.23 Kg	WNEX0403
NT-WX04H D025-S20-Z04	●	25	4	20	120	22	-	-	90°	0.27 Kg	WNEX0403
NT-WX04H D025-S25-Z04	●	25	4	25	120	30	-	-	90°	0.40 Kg	WNEX0403
NT-WX04H D032-S25-Z05	●	32	5	25	130	25	-	-	90°	0.47 Kg	WNEX0403
NT-WX04H D032-S32-Z05	●	32	5	32	130	40	-	-	90°	0.72 Kg	WNEX0403
ARBOR											
NT-WX04H D040-F16-Z05	○	40	5	16	40	-	35	-	90°	-	WNEX0403
NT-WX04H D040-F16-Z07	●	40	7	16	40	-	35	-	90°	0.22 Kg	WNEX0403
NT-WX04H D050-F22-Z06	○	50	6	22	40	-	47	-	90°	-	WNEX0403
NT-WX04H D050-F22-Z09	●	50	9	22	40	-	47	-	90°	0.38 Kg	WNEX0403
NT-WX04H D063-F22-Z08	○	63	8	22	40	-	47	-	90°	-	WNEX0403
NT-WX04H D063-F22-Z10	○	63	10	22	40	-	47	-	90°	-	WNEX0403
NT-WX08H D050-F22-Z04	●	50	4	22	40	-	47	-	90°	0.31 Kg	WNEX0806
NT-WX08H D050-F22-Z05	●	50	5	22	40	-	47	-	90°	0.33 Kg	WNEX0806
NT-WX08H D063-F22-Z06	●	63	6	22	40	-	47	-	90°	0.43 Kg	WNEX0806
NT-WX08H D063-F22-Z07	●	63	7	22	40	-	47	-	90°	0.42 Kg	WNEX0806
NT-WX08H D063-F27-Z06	●	63	6	27	40	-	47	-	90°	0.63 Kg	WNEX0806
NT-WX08H D080-F27-Z07	●	80	7	27	50	-	62.1	-	90°	0.99 Kg	WNEX0806

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

Designation	Stock	DC	CICT	DCON	LF	LU	DCSFMS	CRKS	KAPR	WT	MIID
NT-WX08H D080-F27-Z09	●	80	9	27	50	-	62.1	-	90°	0.96 Kg	WNEX0806
NT-WX08H D100-F32-Z08	●	100	8	32	50	-	77.1	-	90°	-	WNEX0806
NT-WX08H D100-F32-Z11	●	100	11	32	50	-	77.1	-	90°	1.45 Kg	WNEX0806
NT-WX08H D125-F40-Z11	●	125	11	40	63	-	80	-	90°	2.38 Kg	WNEX0806
NT-WX08H D160-F40-Z12	●	160	12	40	63	-	85	-	90°	3.86 Kg	WNEX0806

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

Spare parts	Insert screws 	Flag wrenches 
NT-WX04H D 000-000 -Z 00	NT-ST25056T08HQ	NT-FTB08
NT-WX08H D 000-000 -Z 00	NT-ST40110T15HQ	NT-FTB15

A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES

G - SPARE PARTS

WNEX




Double3Gon

- Double-sided trigonal inserts offering 6 edges!
- Stable sitting in the pocket guarantees more reliability in machining
- Available in diverse grades covering wide application range

HC: Coated carbide HF: Micrograin carbide CVD: Chemical vapour deposition PVD: Physical vapour deposition	HC	HC	HC	HC	HF	HF	HF	HF	HF	HF	HF
	CVD	CVD	CVD	CVD	PVD	PVD	PVD	PVD	PVD	PVD	PVD
	JC7515	JC7530	JC8520	JC9540	JP5530	JP5540	JP7525	JP8525	JP8725	JP9525	JU6520
Stable machining, light cut	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice
General machining, medium cut	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice
Unstable machining, heavy cut	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice
Dimensions		ISO									
		Vc(m/min) - suggested cutting speed range (bold: 1 st choice)									
		P		130 300		100 260	80 220		100 260	100 280	
		M			90 210	60 180	60 180			80 200	
		K	180 360	160 320	160 320			140 300			
		N									300 1100
		S				30 70	20 50				
		H									

Designation		RE	IC	S	D1	BS	Stock									
GENERAL	GP P M K															
	WNEX040304R-GP	0.4	6.7	3.3	3.1	0.9					●	●	▽		▽	
	WNEX040308R-GP	0.8	6.7	3.3	3.1	0.9						●				
LOW FORCE	SC P M S															
	WNEX080604R-SC	0.4	12.5	6.5	4.6	1.8						●	▽			
	WNEX080608R-SC	0.8	12.5	6.5	4.6	1.5						●				
REINFORCED	TE P K															
	WNEX080608R-TE	0.8	12.5	6.5	4.6	1.5	●	▽			●	●	●	●	▽	
	WNEX080612R-TE	1.2	12.5	6.5	4.6	1.1						●	▽			
ALUMINIUM	AL N															
	WNEX080608R-AL	0.8	12.5	6.5	4.6	1.4									●	

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion



A - TURNING	ISO 513	MATERIAL	HARDNESS HB	ae/DC	JC8520			JP5530			JP5540		
	P1 - P2	Free cutting steel and low carbon (ex. 1.0715/9 smn 28/avp, 1.0503/c45)	≤ 200	100%	min	start	max	min	start	max	min	start	max
				30%	130	180	230	100	140	180	80	120	160
				10%	200	240	280	160	200	240	120	160	200
B - THREADING	P3 - P4	Medium and high alloy steel (ex. 1.7225/42 CrMo 4, 1.3505/100 Cr 6)	200 ÷ 300	100%	260	280	300	220	240	260	180	200	220
				30%	100	140	180	80	120	160	60	100	140
				10%	160	200	240	120	160	200	100	140	180
	C - GROOVING	P5 - P6	High tensile strength and tool steel (ex. 1.2344/X 40 CrMoV 5 1/ORVAR, Hardox400®)	300 ÷ 400	100%	220	240		180	200	220	160	180
30%					70	100	130	60	90	120			
10%					120	160	200	100	130	160			
ISO 513		MATERIAL	HARDNESS HB	ae/DC	JC9540			JP5530			JP5540		
D - MILLING	P7	Ferritic and martensitic stainless steel (ex. 1.4021/X 20 Cr 13/AISI420)	≤ 200	100%	min	start	max	min	start	max	min	start	max
				30%	90	130	170	60	100	140	60	100	140
				10%	110	160	210	80	130	180	80	130	180
	E - DRILLING	P8	Precipitation hardening stainless steel (ex. 1.4548/X 5 CrNiCuNb 17 4/17-4-PH)	≤ 450	100%	130	190	250	100	160	220	100	160
30%					70	100	130				50	80	110
10%					80	110	140				60	90	120
F - ACCESSORIES		M1	Austenitic stainless steel (ex. 1.4305/X 10 CrNiS 18 9/AISI303)	> 200	100%	90	120	150	60	90	120	60	90
	30%				110	150	190	80	120	160	80	120	160
	10%				130	170	210	100	140	180	100	140	180
	G - SPARE PARTS	M2 - M3	Austenitic and Duplex stainless steel (ex. 1.4401/X 5 CrNiMo 17 12 2/AISI316)		100%	80	110	140				60	90
30%					90	120	150	70				100	130
10%					100	130	160	80	110	140			
ISO 513		MATERIAL	HARDNESS HB	ae/DC	JC7515			JC8520			JP7525		
H - TURNING	K1	Grey cast iron (ex. 0.6025/GG 25/EN-GJL-250)	150 ÷ 250	100%	min	start	max	min	start	max	min	start	max
				30%	180	230	280	160	200	240	140	180	220
				10%	200	260	320	180	230	280	160	210	260
	I - THREADING	K2	Nodular cast iron (ex. 0.7050/GGG 50/EN-GJS-500-7)	150 ÷ 350	100%	220	290	360	200	260	320	180	240
30%					120	180	240	120	160	200	100	140	180
10%					160	220	280	140	190	240	120	170	220
J - GROOVING		K3 - K4	Austenitic and ADI cast iron (ex. 0.6660/GGL-NiCr 20 2/Ni-Resist 2, GJS-1000-5/ADI1000)	250 ÷ 500	100%	200	260	320	160	220	280	140	200
	30%				100	140	180	100	130	160	90	120	150
	10%				140	180	220	120	160	200	120	150	180
	K - THREADING	N1	Aluminium alloys ≤ Si 12% (ex. 3.4365/AlZn5.5MgCu/ERGA)		100%	180	220	260	140	190	240	150	180
30%					300	400	500						
10%					400	600	800						
L - TURNING		N2	Aluminium alloys Si > 12% (ex. 3.2382/G-AlSi12)		100%	min	start	max					
	30%				200	250	300						
	10%				300	350	400						
	ISO 513	MATERIAL	HARDNESS HB	ae/DC	JC9540			JP5540					
M - TURNING	S1 - S2 - S3	Fe/Ni/Co based heat resistant alloys (ex. Hastelloy, Inconel 625, Inconel 718)		100%	min	start	max	min	start	max			
				30%	30	40	50	20	25	30			
				10%	40	50	60	30	35	40			
	N - THREADING	S4 - S5	Titanium alloys (ex. TiAl2Sn4Zr2MoSi)		100%	50	60	70	40	45	50		
30%								30	40	50			
10%								40	50	60	50	60	70

ae: radial depth of cut; DC: milling cutter diameter
Complete workpiece materials p. H1.

A - TURNING	DESIGNATION	ae/DC	DEPTH OF CUT			FEED RATE		
			ap (mm)			fz (mm)		
			min	start	max	min	start	max
B - THREADING	WNEX040300R-GP	100%	0.60	1.00	1.40	0.05	0.10	0.15
		30%	0.60	1.80	3.00	0.06	0.12	0.18
		10%	0.60	1.80	3.00	0.07	0.14	0.20
	WNEX080600R-GP	100%	1.00	2.50	4.00	0.11	0.18	0.21
		30%	1.00	4.00	7.00	0.14	0.20	0.26
		10%	1.00	4.00	7.00	0.16	0.23	0.30
	WNEX080600R-SC	100%	1.00	2.50	4.00	0.08	0.13	0.18
		30%	1.00	4.00	7.00	0.10	0.16	0.22
		10%	1.00	4.00	7.00	0.12	0.20	0.26
WNEX080600R-TE	100%	1.00	2.50	4.00	0.13	0.19	0.25	
	30%	1.00	4.00	7.00	0.16	0.23	0.30	
	10%	1.00	4.00	7.00	0.20	0.27	0.34	
C - GROOVING	WNEX080608R-AL	100%	1.00	2.50	4.00	0.08	0.14	0.20
		30%	1.00	4.00	7.00	0.10	0.17	0.24
		10%	1.00	4.00	7.00	0.12	0.20	0.28
D - MILLING								
E - DRILLING								
F - ACCESSORIES								
G - SPARE PARTS								