



DOUBLE3GON ACTION


per lavorazioni affidabili ed economiche



inserti a 6 taglienti
affidabili ed economici

SC: Sharp
GP: General
Te: Reinforced
AL: Aluminium
RE 0.4-0.8-1.2

4 rompitruccioli e
3 raggi disponibili



ampia selezione di
gradi e rivestimenti

Acquista 30 inserti e ottieni il corpo fresa allo sconto speciale del 60%

Inserti: WNEX04
Corpi fresa: NT-WX04H

Inserti: WNEX08
Corpi fresa: NT-WX08H

nixkoTOOLS

scadenza 28/02/2026

uemme
TOOLS and EQUIPMENT

DOUBLE3GON

High economical trigonal shoulder milling system for universal processes

APPLICATION


- Shoulder milling
- Shoulders with repeated passes
- Long overhang shoulder milling

ISO APPLICATION FIELDS

P M K N S



ADVANTAGES AND CHARACTERISTICS

- High precision in making 90° side milling
- Reduced cost per edge than conventional shoulder milling systems.
- Very robust system because of the negative trigonal and reliable installation.
- Full range of carbide geometries, radii and grades.
- «Ultra-precise» cutter bodies with special surface treatment to ensure longer life.

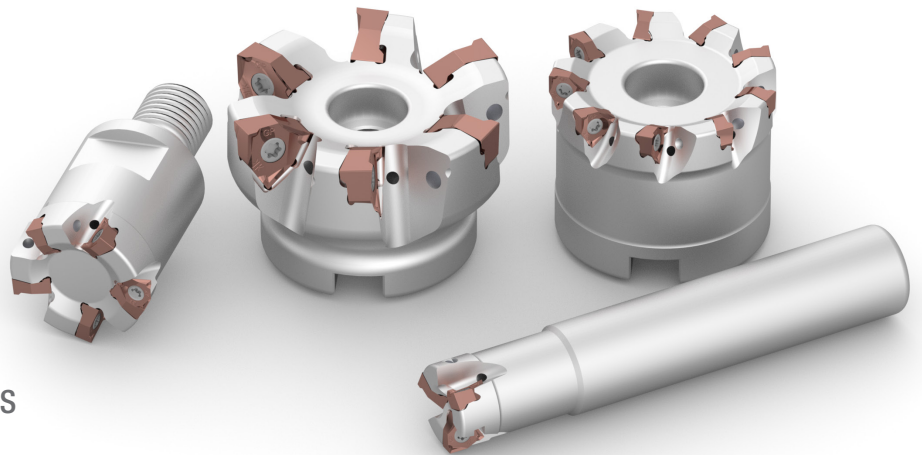


• Cutter bodies

- Arbor type
- Cylindrical type
- Screw-in type
- Extension sleeves (steel/carbide 10xD)
- From D20 to D160



• Inserts

- 6 cutting edges
- Edge length 04 and 08
- Cemented carbide grades with CVD and PVD coatings
- Geometries: SC, GP, TE, AL



A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES



G - SPARE PARTS

NT-WX



Double3Gon

- Double sided trigonal type shoulder milling system, with coolant through
- Tolerance of tool diameter (with Nikko inserts installed) 0/-0.2
- Steel and carbide arbors available for screw-in type holders
- High-Quality Swiss screws guarantee more reliability in your machining



Screw-in



Cylindrical

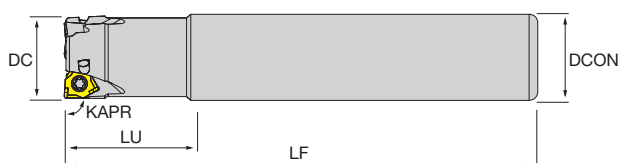

Arbor

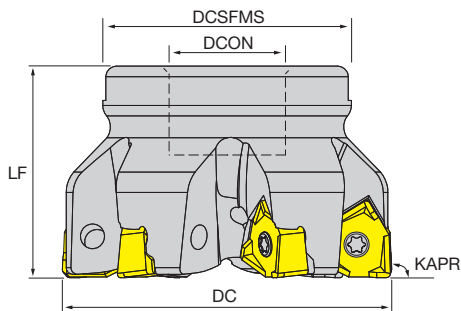

Designation	Stock	DC	CICT	DCON	LF	LU	DCSFMS	CRKS	KAPR	WT	MIID
SCREW-IN											
NT-WX04H D020-M10-Z03	●	20	3	10.5	28	-	-	M10	90°	0.05 Kg	WNEX0403
NT-WX04H D025-M12-Z03	○	25	3	12.5	30	-	-	M12	90°	-	WNEX0403
NT-WX04H D025-M12-Z04	●	25	4	12.5	30	-	-	M12	90°	0.09 Kg	WNEX0403
NT-WX04H D032-M16-Z04	○	32	4	17	40	-	-	M16	90°	-	WNEX0403
NT-WX04H D032-M16-Z05	●	32	5	17	40	-	-	M16	90°	0.20 Kg	WNEX0403
CYLINDRICAL											
NT-WX04H D020-S16-Z03	●	20	3	16	110	20	-	-	90°	0.16 Kg	WNEX0403
NT-WX04H D020-S20-Z03	●	20	3	20	110	28	-	-	90°	0.23 Kg	WNEX0403
NT-WX04H D025-S20-Z04	●	25	4	20	120	22	-	-	90°	0.27 Kg	WNEX0403
NT-WX04H D025-S25-Z04	●	25	4	25	120	30	-	-	90°	0.40 Kg	WNEX0403
NT-WX04H D032-S25-Z05	●	32	5	25	130	25	-	-	90°	0.47 Kg	WNEX0403
NT-WX04H D032-S32-Z05	●	32	5	32	130	40	-	-	90°	0.72 Kg	WNEX0403
ARBOR											
NT-WX04H D040-F16-Z05	○	40	5	16	40	-	35	-	90°	-	WNEX0403
NT-WX04H D040-F16-Z07	●	40	7	16	40	-	35	-	90°	0.22 Kg	WNEX0403
NT-WX04H D050-F22-Z06	○	50	6	22	40	-	47	-	90°	-	WNEX0403
NT-WX04H D050-F22-Z09	●	50	9	22	40	-	47	-	90°	0.38 Kg	WNEX0403
NT-WX04H D063-F22-Z08	○	63	8	22	40	-	47	-	90°	-	WNEX0403
NT-WX04H D063-F22-Z10	○	63	10	22	40	-	47	-	90°	-	WNEX0403
NT-WX08H D050-F22-Z04	●	50	4	22	40	-	47	-	90°	0.31 Kg	WNEX0806
NT-WX08H D050-F22-Z05	●	50	5	22	40	-	47	-	90°	0.33 Kg	WNEX0806
NT-WX08H D063-F22-Z06	●	63	6	22	40	-	47	-	90°	0.43 Kg	WNEX0806
NT-WX08H D063-F22-Z07	●	63	7	22	40	-	47	-	90°	0.42 Kg	WNEX0806
NT-WX08H D063-F27-Z06	●	63	6	27	40	-	47	-	90°	0.63 Kg	WNEX0806
NT-WX08H D080-F27-Z07	●	80	7	27	50	-	62.1	-	90°	0.99 Kg	WNEX0806

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

Designation	Stock	DC	CICT	DCON	LF	LU	DCSFMS	CRKS	KAPR	WT	MIID
NT-WX08H D080-F27-Z09	●	80	9	27	50	-	62.1	-	90°	0.96 Kg	WNEX0806
NT-WX08H D100-F32-Z08	●	100	8	32	50	-	77.1	-	90°	-	WNEX0806
NT-WX08H D100-F32-Z11	●	100	11	32	50	-	77.1	-	90°	1.45 Kg	WNEX0806
NT-WX08H D125-F40-Z11	●	125	11	40	63	-	80	-	90°	2.38 Kg	WNEX0806
NT-WX08H D160-F40-Z12	●	160	12	40	63	-	85	-	90°	3.86 Kg	WNEX0806

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

Spare parts	Insert screws 	Flag wrenches 
NT-WX04H D 000-000 -Z 00	NT-ST25056T08HQ	NT-FTB08
NT-WX08H D 000-000 -Z 00	NT-ST40110T15HQ	NT-FTB15

A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING


F - ACCESSORIES

G - SPARE PARTS

WNEX




Double3Gon

- Double-sided trigonal inserts offering 6 edges!
- Stable sitting in the pocket guarantees more reliability in machining
- Available in diverse grades covering wide application range

HC: Coated carbide HF: Micrograin carbide CVD: Chemical vapour deposition PVD: Physical vapour deposition	HC	HC	HC	HC	HF	HF	HF	HF	HF	HF	HF	
	CVD	CVD	CVD	CVD	PVD	PVD	PVD	PVD	PVD	PVD	PVD	
	JC7515	JC7530	JC8520	JC9540	JP5530	JP5540	JP7525	JP8525	JP8725	JP9525	JU6520	
Stable machining, light cut	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	
General machining, medium cut	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	
Unstable machining, heavy cut	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	○ suitable	● 1 st choice	
Dimensions		ISO										
		Vc(m/min) - suggested cutting speed range (bold: 1 st choice)										
		P		130	100	80		100	100			
		M		300	260	220		260	280			
		K	180	160	160	90	60	60		80		
		N	360	320	320	210	180	180		200		
		S									300	
		H									1100	

Designation		RE	IC	S	D1	BS	Stock										
GENERAL	GP P M K	WNEX040304R-GP	0.4	6.7	3.3	3.1	0.9						●	●	▽		▽
		WNEX040308R-GP	0.8	6.7	3.3	3.1	0.9							●			
		WNEX080608R-GP	0.8	12.5	6.5	4.6	1.5	●		●	●	●	●	●		●	
LOW FORCE	SC P M S	WNEX080604R-SC	0.4	12.5	6.5	4.6	1.8						●		▽		
		WNEX080608R-SC	0.8	12.5	6.5	4.6	1.5						●				
REINFORCED	TE P K	WNEX080608R-TE	0.8	12.5	6.5	4.6	1.5	●	▽			●	●	●		●	▽
		WNEX080612R-TE	1.2	12.5	6.5	4.6	1.1						●		▽		
ALUMINIUM	AL N	WNEX080608R-AL	0.8	12.5	6.5	4.6	1.4										●

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion



	ISO 513	MATERIAL	HARDNESS HB	ae/DC	JC8520			JP5530			JP5540		
					min	start	max	min	start	max	min	start	max
A - TURNING	P1 - P2	Free cutting steel and low carbon (ex. 1.0715/9 smn 28/avp, 1.0503/c45)	≤ 200	100%	130	180	230	100	140	180	80	120	160
				30%	200	240	280	160	200	240	120	160	200
				10%	260	280	300	220	240	260	180	200	220
B - THREADING	P3 - P4	Medium and high alloy steel (ex. 1.7225/42 CrMo 4, 1.3505/100 Cr 6)	200 ÷ 300	100%	100	140	180	80	120	160	60	100	140
				30%	160	200	240	120	160	200	100	140	180
				10%	220	240	260	180	200	220	160	180	200
C - GROOVING	P5 - P6	High tensile strength and tool steel (ex. 1.2344/X 40 CrMoV 5 1/ORVAR, Hardox400®)	300 ÷ 400	100%	70	100	130	60	90	120			
				30%	120	160	200	100	130	160			
				10%	200	220	240	140	170	200			
	ISO 513	MATERIAL	HARDNESS HB	ae/DC	JC9540			JP5530			JP5540		
					min	start	max	min	start	max	min	start	max
D - MILLING	P7	Ferritic and martensitic stainless steel (ex. 1.4021/X 20 Cr 13/AISI420)	≤ 200	100%	90	130	170	60	100	140	60	100	140
				30%	110	160	210	80	130	180	80	130	180
				10%	130	190	250	100	160	220	100	160	220
E - DRILLING	P8	Precipitation hardening stainless steel (ex. 1.4548/X 5 CrNiCuNb 17 4/17-4-PH)	≤ 450	100%	70	100	130				50	80	110
				30%	80	110	140				60	90	120
				10%	90	120	150				70	100	130
F - ACCESSORIES	M1	Austenitic stainless steel (ex. 1.4305/X 10 CrNiS 18 9/AISI303)	> 200	100%	90	120	150	60	90	120	60	90	120
				30%	110	150	190	80	120	160	80	120	160
				10%	130	170	210	100	140	180	100	140	180
G - SPARE PARTS	M2 - M3	Austenitic and Duplex stainless steel (ex. 1.4401/X 5 CrNiMo 17 12 2/AISI316)		100%	80	110	140				60	90	120
				30%	90	120	150				70	100	130
				100%	100	130	160				80	110	140
	ISO 513	MATERIAL	HARDNESS HB	ae/DC	JC7515			JC8520			JP7525		
					min	start	max	min	start	max	min	start	max
H - TURNING	K1	Grey cast iron (ex. 0.6025/GG 25/EN-GJL-250)	150 ÷ 250	100%	180	230	280	160	200	240	140	180	220
				30%	200	260	320	180	230	280	160	210	260
				10%	220	290	360	200	260	320	180	240	300
I - DRILLING	K2	Nodular cast iron (ex. 0.7050/GGG 50/EN-GJS-500-7)	150 ÷ 350	100%	120	180	240	120	160	200	100	140	180
				30%	160	220	280	140	190	240	120	170	220
				10%	200	260	320	160	220	280	140	200	260
J - TURNING	K3 - K4	Austenitic and ADI cast iron (ex. 0.6660/GGL-NiCr 20 2/Ni-Resist 2, GJS-1000-5/ADI1000)	250 ÷ 500	100%	100	140	180	100	130	160	90	120	150
				30%	140	180	220	120	160	200	120	150	180
				10%	180	220	260	140	190	240	150	180	210
	ISO 513	MATERIAL	HARDNESS HB	ae/DC	JU6520								
					min	start	max						
K - TURNING	N1	Aluminium alloys ≤ Si 12% (ex. 3.4365/AlZn5.5MgCu/ERGA)		100%	300	400	500						
				30%	400	600	800						
				10%	500	800	1100						
L - TURNING	N2	Aluminium alloys Si > 12% (ex. 3.2382/G-AlSi12)		100%	200	250	300						
				30%	300	350	400						
				10%	400	450	500						
	ISO 513	MATERIAL	HARDNESS HB	ae/DC	JC9540			JP5540					
					min	start	max	min	start	max			
M - TURNING	S1 - S2 - S3	Fe/Ni/Co based heat resistant alloys (ex. Hastelloy, Inconel 625, Inconel 718)		100%	30	40	50	20	25	30			
				30%	40	50	60	30	35	40			
				10%	50	60	70	40	45	50			
N - TURNING	S4 - S5	Titanium alloys (ex. TiAl2Sn4Zr2MoSi)		100%				30	40	50			
				30%				40	50	60			
				10%				50	60	70			

ae: radial depth of cut; DC: milling cutter diameter

Complete workpiece materials p. H1.

[illegible]

D35

A - TURNING	DESIGNATION	ae/DC	DEPTH OF CUT			FEED RATE		
			ap (mm)			fz (mm)		
			min	start	max	min	start	max
B - THREADING	WNEX040300R-GP	100%	0.60	1.00	1.40	0.05	0.10	0.15
		30%	0.60	1.80	3.00	0.06	0.12	0.18
		10%	0.60	1.80	3.00	0.07	0.14	0.20
	WNEX080600R-GP	100%	1.00	2.50	4.00	0.11	0.18	0.21
		30%	1.00	4.00	7.00	0.14	0.20	0.26
		10%	1.00	4.00	7.00	0.16	0.23	0.30
	WNEX080600R-SC	100%	1.00	2.50	4.00	0.08	0.13	0.18
		30%	1.00	4.00	7.00	0.10	0.16	0.22
		10%	1.00	4.00	7.00	0.12	0.20	0.26
WNEX080600R-TE	100%	1.00	2.50	4.00	0.13	0.19	0.25	
	30%	1.00	4.00	7.00	0.16	0.23	0.30	
	10%	1.00	4.00	7.00	0.20	0.27	0.34	
C - GROOVING	WNEX080608R-AL	100%	1.00	2.50	4.00	0.08	0.14	0.20
		30%	1.00	4.00	7.00	0.10	0.17	0.24
		10%	1.00	4.00	7.00	0.12	0.20	0.28
D - MILLING								
E - DRILLING								
F - ACCESSORIES								
G - SPARE PARTS								