


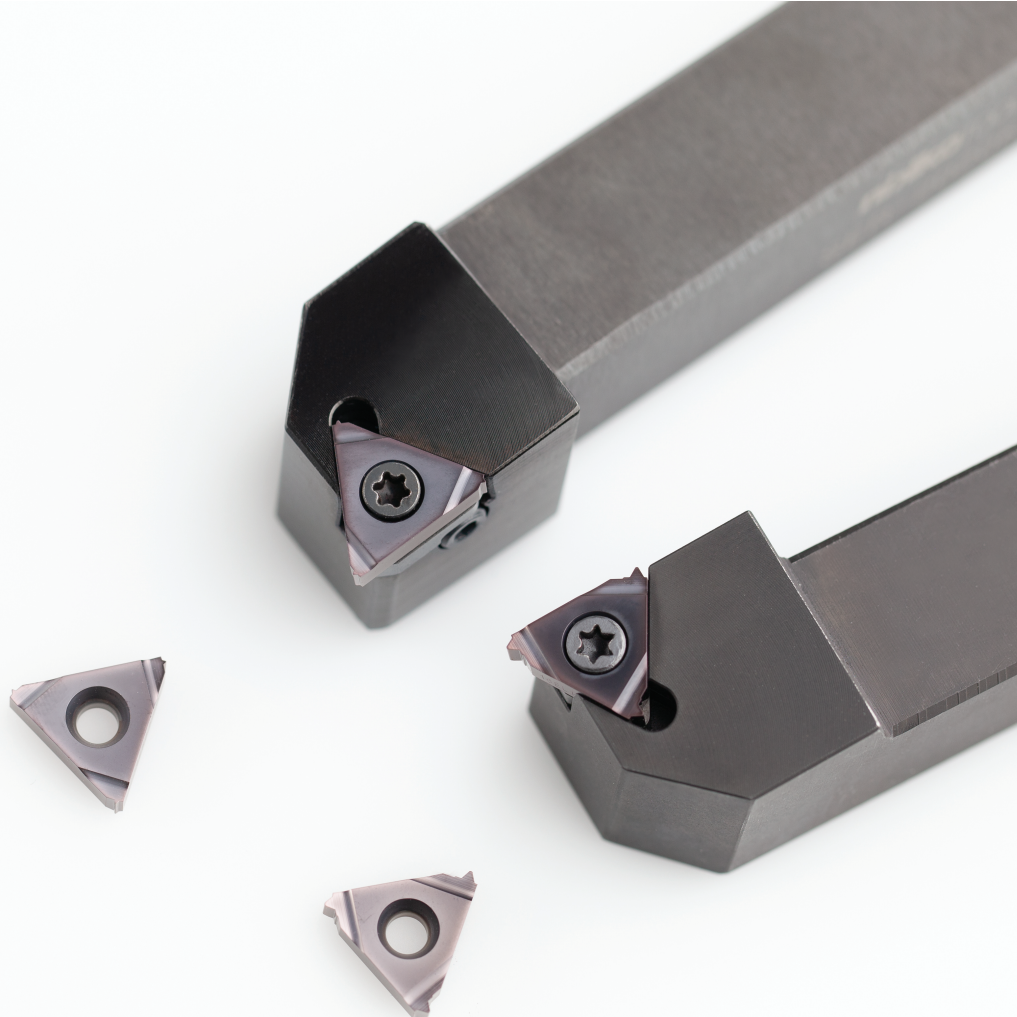

# THREADING ACTION

Acquista 30 inserti e ottieni l'utensile allo sconto speciale del 60%


Inserti: 16ER  
Utensili: NT-SER

Inserti: 16IR  
Utensili: NT-SIR

**nikko**TOOLS

**(uemme)**  
TOOLS plus EQUIPMENT

scadenza: 31/12/2025



## THREADING External threads

Inserts .B8

Holders .B12

Table "Number of passes" .B13

# External


## ISO 16-22

- **M**: metric threads
- **W**: parallel pipe threads (whitworth)
- **UN**: unified inch threads
- **NPT**: American national tapered pipe threads
- **BSPT**: tapered pipe threads
- Partial profile with **55°** or **60°** angle, for metric, unified and parallel pipe threads

HF: Micrograin carbide  
BL: Low volume CBN  
DP: Polycrystalline diamond  
PVD: Physical vapour deposition

| HF            | HF            | BL             | DP           |
|---------------|---------------|----------------|--------------|
| PVD           | PVD           | PVD            |              |
| <b>JP5120</b> | <b>JP5125</b> | <b>NBL350C</b> | <b>ND050</b> |

|                               |                          |            |   |   |   |   |
|-------------------------------|--------------------------|------------|---|---|---|---|
| Stable machining, light cut   | ● 1 <sup>st</sup> choice | ○ suitable | ● | ○ | ● | ○ |
| General machining, medium cut | ● 1 <sup>st</sup> choice | ○ suitable | ● | ○ | ● | ○ |
| Unstable machining, heavy cut | ● 1 <sup>st</sup> choice | ○ suitable | ● | ○ | ● | ○ |



| ISO      | Vc(m/min) - suggested cutting speed range (bold: 1 <sup>st</sup> choice) |           |           |             |  |  |
|----------|--------------------------------------------------------------------------|-----------|-----------|-------------|--|--|
| <b>P</b> | 90<br>200                                                                | 70<br>180 |           |             |  |  |
| <b>M</b> | 60<br>150                                                                | 50<br>140 |           |             |  |  |
| <b>K</b> | 90<br>190                                                                | 60<br>180 |           |             |  |  |
| <b>N</b> |                                                                          |           |           | 400<br>1600 |  |  |
| <b>S</b> |                                                                          |           |           | 50<br>100   |  |  |
| <b>H</b> |                                                                          |           | 60<br>140 |             |  |  |

| Designation                                                                                                                                    |                | RE   | TP   | PDX | PDY | IC    | Stock |   |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------|------|-----|-----|-------|-------|---|--|--|
| FULL PROFILE<br><br>TPM pressed type<br>chip control oriented | 16ER100ISO-TPM | 0.14 | 1    | 0.7 | 0.8 | 9.525 | ●     | ● |  |  |
|                                                                                                                                                | 16ER125ISO-TPM | 0.18 | 1.25 | 0.9 | 0.8 | 9.525 | ●     | ● |  |  |
|                                                                                                                                                | 16ER150ISO-TPM | 0.22 | 1.5  | 1   | 0.8 | 9.525 | ●     | ● |  |  |
|                                                                                                                                                | 16ER175ISO-TPM | 0.25 | 1.75 | 1.2 | 1.2 | 9.525 | ●     | ● |  |  |
|                                                                                                                                                | 16ER200ISO-TPM | 0.29 | 2    | 1.3 | 1.2 | 9.525 | ●     | ● |  |  |
|                                                                                                                                                | 16ER250ISO-TPM | 0.36 | 2.5  | 1.5 | 1.2 | 9.525 | ●     | ● |  |  |
|                                                                                                                                                | 16ER300ISO-TPM | 0.43 | 3    | 1.5 | 1.2 | 9.525 | ●     | ● |  |  |
| FULL PROFILE<br><br>precision ground<br>sharpness oriented  | 16ER050ISO     | 0.07 | 0.5  | 0.6 | 0.6 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER070ISO     | 0.1  | 0.7  | 0.6 | 0.6 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER075ISO     | 0.11 | 0.75 | 0.6 | 0.6 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER080ISO     | 0.12 | 0.8  | 0.6 | 0.6 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER100ISO     | 0.15 | 1    | 0.7 | 0.7 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER125ISO     | 0.18 | 1.25 | 0.9 | 0.8 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER150ISO     | 0.22 | 1.5  | 1   | 0.8 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER175ISO     | 0.25 | 1.75 | 1.2 | 0.9 | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER200ISO     | 0.29 | 2    | 1.3 | 1   | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER250ISO     | 0.36 | 2.5  | 1.5 | 1   | 9.525 |       | ● |  |  |
|                                                                                                                                                | 16ER300ISO     | 0.43 | 3    | 1.6 | 1.2 | 9.525 |       | ● |  |  |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

### FULL PROFILE



- Full profile insert will form a complete thread profile including the crest.
- The distance between root and crest is controlled.
- The insert can produce only one pitch.
- Higher tool pressure compared to partial profile.

### PRESSED VS GROUND

#### TPM pressed

- Improves the chip control
- Strongly recommended in internal application especially for difficult materials
- Best cost-performance ratio

#### Precision ground

- Achieves the higher precision
- A sharper cutting edge can guarantee very smooth cutting action
- Every kind of thread's standard can be easily produced using the same blank

| External                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                 | HF: Micrograin carbide<br>BL: Low volume CBN<br>DP: Polycrystalline diamond<br>PVD: Physical vapour deposition |           | HF<br>PVD | HF<br>PVD                                                                | BL<br>PVD   | DP        |   |   |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------|-----------|--------------------------------------------------------------------------|-------------|-----------|---|---|-------|
| ISO 16-22                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                 |                                                                                                                |           | JPS120    | JPS125                                                                   | NBL350C     | ND050     |   |   |       |
| <ul style="list-style-type: none"><li>• <b>M</b>: metric threads</li><li>• <b>W</b>: parallel pipe threads (whitworth)</li><li>• <b>UN</b>: unified inch threads</li><li>• <b>NPT</b>: American national tapered pipe threads</li><li>• <b>BSPT</b>: tapered pipe threads</li><li>• Partial profile with <b>55°</b> or <b>60°</b> angle, for metric, unified and parallel pipe threads</li></ul> | Stable machining, light cut ● 1 <sup>st</sup> choice ○ suitable                 |                                                                                                                | ●         | ○         | ●                                                                        | ●           |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  | General machining, medium cut ● 1 <sup>st</sup> choice ○ suitable               |                                                                                                                | ●         | ●         |                                                                          |             |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  | Unstable machining, heavy cut ⚙ 1 <sup>st</sup> choice ⚙ suitable               |                                                                                                                |           | ⚙         |                                                                          |             |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  | Dimensions                                                                      |                                                                                                                | ISO       |           | Vc(m/min) - suggested cutting speed range (bold: 1 <sup>st</sup> choice) |             |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  | <p>TP: thread pitch</p> <p>3 edges</p> <p>S 16E 3.65 4.00<br/>22E 4.71 5.00</p> | <b>P</b>                                                                                                       | 90<br>200 | 70<br>180 |                                                                          |             |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | <b>M</b>                                                                                                       | 60<br>150 | 50<br>140 |                                                                          |             |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | <b>K</b>                                                                                                       | 90<br>190 | 60<br>180 |                                                                          |             |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | <b>N</b>                                                                                                       |           |           |                                                                          | 400<br>1600 |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | <b>S</b>                                                                                                       |           |           |                                                                          | 50<br>100   |           |   |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 |                                                                                                                |           |           | <b>H</b>                                                                 |             | 60<br>140 |   |   |       |
| Designation                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                 | RE                                                                                                             | TP        | PDX       | PDY                                                                      | IC          |           |   |   | Stock |
| <b>FULL PROFILE</b><br><br><b>PCD</b> carbide backed single edge                                                                                                                                                                                                                                                                                                                                 | <b>M N</b>                                                                      | 16ER100ISO-1C                                                                                                  | 0.15      | 1         | 0.7                                                                      | 9.525       |           |   | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER125ISO-1C                                                                                                  | 0.16      | 1.25      | 0.9                                                                      | 9.525       |           |   | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER150ISO-1C                                                                                                  | 0.22      | 1.5       | 1                                                                        | 9.525       |           |   | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER175ISO-1C                                                                                                  | 0.26      | 1.75      | 1.2                                                                      | 9.525       |           |   | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER200ISO-1C                                                                                                  | 0.29      | 2         | 1.3                                                                      | 9.525       |           |   | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER250ISO-1C                                                                                                  | 0.37      | 2.5       | 1.5                                                                      | 9.525       |           |   | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER300ISO-1C                                                                                                  | 0.43      | 3         | 1.5                                                                      | 9.525       |           |   | ● |       |
| <b>FULL PROFILE</b><br><br><b>PCBN</b> solid brazing single edge                                                                                                                                                                                                                                                                                                                                 | <b>M H</b>                                                                      | 16ER100ISO-1S                                                                                                  | 0.15      | 1         | 0.7                                                                      | 9.525       |           | ● |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER125ISO-1S                                                                                                  | 0.16      | 1.25      | 0.9                                                                      | 9.525       |           | ● |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER150ISO-1S                                                                                                  | 0.22      | 1.5       | 1                                                                        | 9.525       |           | ● |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER175ISO-1S                                                                                                  | 0.26      | 1.75      | 1.2                                                                      | 9.525       |           | ● |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER200ISO-1S                                                                                                  | 0.29      | 2         | 1.3                                                                      | 9.525       |           | ● |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER250ISO-1S                                                                                                  | 0.37      | 2.5       | 1.5                                                                      | 9.525       |           | ● |   |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER300ISO-1S                                                                                                  | 0.43      | 3         | 1.5                                                                      | 9.525       |           | ● |   |       |
| <b>FULL PROFILE</b><br><br><b>TPM pressed type</b> chip control oriented                                                                                                                                                                                                                                                                                                                         | <b>W P M K</b>                                                                  | 16ER11W-TPM                                                                                                    | 0.3       | 11        | 1.5                                                                      | 1.2         | 9.525     | ● | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER14W-TPM                                                                                                    | 0.24      | 14        | 1.5                                                                      | 1.2         | 9.525     | ● | ● |       |
|                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 | 16ER19W-TPM                                                                                                    | 0.17      | 19        | 1                                                                        | 0.8         | 9.525     |   | ● |       |

# External


## ISO 16-22

- **M**: metric threads
- **W**: parallel pipe threads (whitworth)
- **UN**: unified inch threads
- **NPT**: American national tapered pipe threads
- **BSPT**: tapered pipe threads
- Partial profile with **55°** or **60°** angle, for metric, unified and parallel pipe threads

HF: Micrograin carbide  
BL: Low volume CBN  
DP: Polycrystalline diamond  
PVD: Physical vapour deposition

| HF            | HF            | BL             | DP           |
|---------------|---------------|----------------|--------------|
| PVD           | PVD           | PVD            |              |
| <b>JP5120</b> | <b>JP5125</b> | <b>NBL350C</b> | <b>ND050</b> |

|                               |                          |            |   |   |   |   |
|-------------------------------|--------------------------|------------|---|---|---|---|
| Stable machining, light cut   | ● 1 <sup>st</sup> choice | ○ suitable | ● | ○ | ● | ○ |
| General machining, medium cut | ● 1 <sup>st</sup> choice | ○ suitable | ● | ○ | ● | ○ |
| Unstable machining, heavy cut | ● 1 <sup>st</sup> choice | ○ suitable | ● | ○ | ● | ○ |



| ISO      | Vc(m/min) - suggested cutting speed range (bold: 1 <sup>st</sup> choice) |           |    |             |  |  |
|----------|--------------------------------------------------------------------------|-----------|----|-------------|--|--|
| <b>P</b> | 90<br>200                                                                | 70<br>180 |    |             |  |  |
| <b>M</b> | 60<br>150                                                                | 50<br>140 |    |             |  |  |
| <b>K</b> | 90<br>190                                                                | 60<br>180 |    |             |  |  |
| <b>N</b> |                                                                          |           |    | 400<br>1600 |  |  |
| <b>S</b> |                                                                          |           |    | 50<br>100   |  |  |
| <b>H</b> |                                                                          |           | 60 | 140         |  |  |

| Designation  |                   | RE              | TP   | PDX  | PDY | IC  | Stock |   |  |  |
|--------------|-------------------|-----------------|------|------|-----|-----|-------|---|--|--|
| FULL PROFILE | UN <b>P M K</b>   | 16ER08UN-TPM    | 0.46 | 8    | 1.7 | 1.3 | 9.525 | ● |  |  |
|              |                   | 16ER12UN-TPM    | 0.31 | 12   | 1.5 | 1.2 | 9.525 | ● |  |  |
|              |                   | 16ER14UN-TPM    | 0.26 | 14   | 1.5 | 1.2 | 9.525 | ● |  |  |
|              |                   | 16ER16UN-TPM    | 0.23 | 16   | 1.1 | 0.9 | 9.525 | ● |  |  |
|              |                   | 16ER18UN-TPM    | 0.2  | 18   | 1   | 0.8 | 9.525 | ● |  |  |
|              |                   | 16ER20UN-TPM    | 0.18 | 20   | 0.9 | 0.8 | 9.525 | ● |  |  |
|              |                   | 16ER24UN-TPM    | 0.15 | 24   | 0.8 | 0.8 | 9.525 | ● |  |  |
| FULL PROFILE | NPT <b>P M K</b>  | 16ER11.5NPT-TPM | 0.25 | 11.5 | 1.5 | 1.2 | 9.525 | ● |  |  |
|              |                   | 16ER14NPT-TPM   | 0.22 | 14   | 1.5 | 1.2 | 9.525 | ● |  |  |
|              |                   | 16ER18NPT-TPM   | 0.2  | 18   | 1   | 0.8 | 9.525 | ● |  |  |
| FULL PROFILE | NPT <b>P M K</b>  | 16ER11.5NPT     | 0.07 | 11.5 | 1.5 | 1.1 | 9.525 | ● |  |  |
|              |                   | 16ER14NPT       | 0.06 | 14   | 1   | 0.8 | 9.525 | ● |  |  |
| FULL PROFILE | BSPT <b>P M K</b> | 16ER11BSPT-TPM  | 0.3  | 11   | 1.5 | 1.2 | 9.525 | ● |  |  |
|              |                   | 16ER14BSPT-TPM  | 0.24 | 14   | 1.5 | 1.2 | 9.525 | ● |  |  |
|              |                   | 16ER19BSPT-TPM  | 0.17 | 19   | 1   | 0.8 | 9.525 | ● |  |  |
|              |                   | 16ER28BSPT-TPM  | 0.11 | 28   | 0.8 | 0.7 | 9.525 | ● |  |  |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

### FULL PROFILE



- Full profile insert will form a complete thread profile including the crest.
- The distance between root and crest is controlled.
- The insert can produce only one pitch.
- Higher tool pressure compared to partial profile.

### PRESSED VS GROUND

#### TPM pressed

- Improves the chip control
- Strongly recommended in internal application especially for difficult materials
- Best cost-performance ratio

#### Precision ground

- Achieves the higher precision
- A sharper cutting edge can guarantee very smooth cutting action
- Every kind of thread's standard can be easily produced using the same blank

| External                                                                                                                                                                                                                                                                                                                                                                                    |              | HF: Micrograin carbide<br>BL: Low volume CBN<br>DP: Polycrystalline diamond<br>PVD: Physical vapour deposition                                                                                            |           |           |     |       |       |                                                                          |        |         |       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----|-------|-------|--------------------------------------------------------------------------|--------|---------|-------|
| ISO 16-22                                                                                                                                                                                                                                                                                                                                                                                   |              |                                                                                                                                                                                                           |           |           |     |       |       | HF PVD                                                                   | HF PVD | BL PVD  | DP    |
| <ul style="list-style-type: none"> <li><b>M</b>: metric threads</li> <li><b>W</b>: parallel pipe threads (whitworth)</li> <li><b>UN</b>: unified inch threads</li> <li><b>NPT</b>: American national tapered pipe threads</li> <li><b>BSPT</b>: tapered pipe threads</li> <li>Partial profile with <b>55°</b> or <b>60°</b> angle, for metric, unified and parallel pipe threads</li> </ul> |              | Stable machining, light cut ● 1 <sup>st</sup> choice ○ suitable<br>General machining, medium cut ● 1 <sup>st</sup> choice ○ suitable<br>Unstable machining, heavy cut ⚙ 1 <sup>st</sup> choice ⚙ suitable |           |           |     |       |       | JP5120                                                                   | JP5125 | NBL350C | ND050 |
| Dimensions<br>                                                                                                                                                                                                                                                                                                                                                                              |              | ISO                                                                                                                                                                                                       |           |           |     |       |       | Vc(m/min) - suggested cutting speed range (bold: 1 <sup>st</sup> choice) |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              | P                                                                                                                                                                                                         | 90<br>200 | 70<br>180 |     |       |       |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              | M                                                                                                                                                                                                         | 60<br>150 | 50<br>140 |     |       |       |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              | K                                                                                                                                                                                                         | 90<br>190 | 60<br>180 |     |       |       |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              | N                                                                                                                                                                                                         |           |           |     |       |       | 400<br>1600                                                              |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              | S                                                                                                                                                                                                         |           |           |     |       |       | 50<br>100                                                                |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              | H                                                                                                                                                                                                         |           |           |     |       |       | 60<br>140                                                                |        |         |       |
| Designation<br>                                                                                                                                                                                                                                                                                                                                                                             |              | RE                                                                                                                                                                                                        | TP        | PDX       | PDY | IC    | Stock |                                                                          |        |         |       |
| PARTIAL PROFILE<br>60° <b>P M K</b><br><br>TPM pressed type<br>chip control oriented                                                                                                                                                                                                                                                                                                        | 16ERA60-TPM  | 0.08                                                                                                                                                                                                      | -         | 0.9       | 0.8 | 9.525 | ●     |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             | 16ERAG60-TPM | 0.08                                                                                                                                                                                                      | -         | 1.5       | 1.1 | 9.525 | ●     |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             | 16ERG60-TPM  | 0.25                                                                                                                                                                                                      | -         | 1.7       | 1.2 | 9.525 | ●     |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              |                                                                                                                                                                                                           |           |           |     |       |       |                                                                          |        |         |       |
| PARTIAL PROFILE<br>55° <b>P M K</b><br><br>TPM pressed type<br>chip control oriented                                                                                                                                                                                                                                                                                                        | 16ERA55-TPM  | 0.08                                                                                                                                                                                                      | -         | 0.9       | 0.8 | 9.525 | ●     |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             | 16ERAG55-TPM | 0.08                                                                                                                                                                                                      | -         | 1.5       | 1.1 | 9.525 | ●     |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             | 16ERG55-TPM  | 0.21                                                                                                                                                                                                      | -         | 1.7       | 1.2 | 9.525 | ●     |                                                                          |        |         |       |
|                                                                                                                                                                                                                                                                                                                                                                                             |              |                                                                                                                                                                                                           |           |           |     |       |       |                                                                          |        |         |       |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

#### PARTIAL PROFILE



- Partial profile insert works without cuts the outer diameter of the thread.
- The same insert can be used for a broad range of different thread pitches.
- Can produce burr that must be taken away.

#### PARTIAL PROFILE 60° PITCH RANGES

|      | M         | UN    |
|------|-----------|-------|
| A60  | 0.50÷1.50 | 48÷16 |
| AG60 | 0.50÷3.00 | 48÷8  |
| G60  | 1.75÷3.00 | 14÷8  |
| N60  | 3.50÷5.00 | 7÷5   |

#### PARTIAL PROFILE 55° PITCH RANGES

|      | BSW-BSF-BSP |
|------|-------------|
| A55  | 48÷16       |
| AG55 | 48÷8        |
| G55  | 14÷8        |
| N55  | 7÷5         |

A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES

G - SPARE PARTS



## SE

### ISO 16-22

- External threading holder
- Tightened by screws
- Available with shim, convenient to change inserts
- Holds both pressed type and ground type threading inserts



Without offset

Right-hand shown

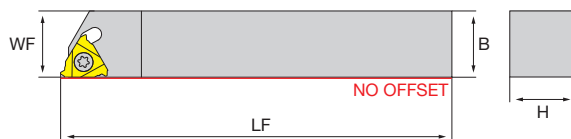

Standard design

Right-hand shown

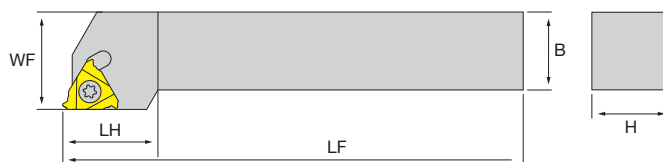


| Designation            | Stock |   | H  | B  | WF | LF  | LH |  |  |  |  | MIID      |
|------------------------|-------|---|----|----|----|-----|----|--|--|--|--|-----------|
|                        | L     | R |    |    |    |     |    |  |  |  |  |           |
| <b>WITHOUT OFFSET</b>  |       |   |    |    |    |     |    |  |  |  |  |           |
| NT-SER1212H16N         | ○     | ○ | 12 | 12 | 12 | 100 | -  |  |  |  |  | 16EL/R000 |
| NT-SER1616H16N         | ○     | ○ | 16 | 16 | 16 | 100 | -  |  |  |  |  | 16EL/R000 |
| <b>STANDARD DESIGN</b> |       |   |    |    |    |     |    |  |  |  |  |           |
| NT-SER1616H16          | ●     | ● | 16 | 16 | 20 | 100 | 22 |  |  |  |  | 16EL/R000 |
| NT-SER2020K16          | ●     | ● | 20 | 20 | 25 | 125 | 25 |  |  |  |  | 16EL/R000 |
| NT-SER2525M16          | ●     | ● | 25 | 25 | 32 | 150 | 25 |  |  |  |  | 16EL/R000 |
| NT-SER2525M22          |       | ● | 25 | 25 | 32 | 150 | 29 |  |  |  |  | 22ER000   |
| NT-SER3232M22          |       | ● | 32 | 32 | 40 | 170 | 32 |  |  |  |  | 22ER000   |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion


| Spare parts    | Shim | Shim     | Locking screws | L wrench | Insert screws | Flag wrenches |
|----------------|------|----------|----------------|----------|---------------|---------------|
|                |      |          |                |          |               |               |
| NT-SER00000160 | -    | NT-SH060 | NT-SC003       | NT-WR025 | NT-ST35115T15 | NT-FT15       |
| NT-SER00000220 | -    | NT-SH066 | NT-SC004       | NT-WR030 | NT-ST40140T15 | NT-FT15       |

**EXTERNAL THREAD** right-hand




Insert: ER  
Holder: R  
Rotation: counterclockwise  
Direction: towards chuck

**EXTERNAL THREAD** right-hand




Insert: EL  
Holder: L  
Rotation: clockwise  
Direction: from chuck

**EXTERNAL THREAD** left-hand



Insert: EL  
Holder: L  
Rotation: clockwise  
Direction: towards chuck

**EXTERNAL THREAD** left-hand



Insert: ER  
Holder: R  
Rotation: counterclockwise  
Direction: from chuck

## M - External ISO-metric threads

| TP              | 6.00                    | 5.50 | 5.00 | 4.50 | 4.00 | 3.50 | 3.00 | 2.50 | 2.00 | 1.75 | 1.50 | 1.25 | 1.00 | 0.80 | 0.75 | 0.70 | 0.50 |  |
|-----------------|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|
| NO. OF INFEEDES | RADIAL INFEEDE PER PASS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |  |
| 1               | 0.46                    | 0.43 | 0.41 | 0.37 | 0.34 | 0.34 | 0.28 | 0.27 | 0.24 | 0.22 | 0.22 | 0.21 | 0.18 | 0.17 | 0.16 | 0.14 | 0.11 |  |
| 2               | 0.43                    | 0.40 | 0.39 | 0.34 | 0.32 | 0.31 | 0.26 | 0.24 | 0.22 | 0.20 | 0.20 | 0.17 | 0.16 | 0.15 | 0.14 | 0.12 | 0.09 |  |
| 3               | 0.35                    | 0.32 | 0.32 | 0.28 | 0.25 | 0.25 | 0.21 | 0.20 | 0.18 | 0.17 | 0.17 | 0.14 | 0.12 | 0.12 | 0.11 | 0.10 | 0.07 |  |
| 4               | 0.30                    | 0.28 | 0.27 | 0.24 | 0.22 | 0.21 | 0.18 | 0.17 | 0.16 | 0.14 | 0.14 | 0.11 | 0.11 | 0.08 | 0.07 | 0.07 | 0.06 |  |
| 5               | 0.29                    | 0.26 | 0.24 | 0.22 | 0.20 | 0.18 | 0.16 | 0.15 | 0.14 | 0.12 | 0.12 | 0.10 | 0.08 | -    | -    | -    | -    |  |
| 6               | 0.26                    | 0.24 | 0.24 | 0.22 | 0.18 | 0.18 | 0.15 | 0.15 | 0.12 | 0.10 | 0.08 | 0.08 | -    | -    | -    | -    | -    |  |
| 7               | 0.24                    | 0.21 | 0.22 | 0.20 | 0.17 | 0.16 | 0.14 | 0.12 | 0.11 | 0.10 | -    | -    | -    | -    | -    | -    | -    |  |
| 8               | 0.23                    | 0.20 | 0.20 | 0.18 | 0.15 | 0.15 | 0.13 | 0.11 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    |  |
| 9               | 0.22                    | 0.19 | 0.19 | 0.17 | 0.14 | 0.14 | 0.12 | 0.11 | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 10              | 0.19                    | 0.18 | 0.18 | 0.16 | 0.13 | 0.12 | 0.11 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 11              | 0.18                    | 0.17 | 0.16 | 0.14 | 0.12 | 0.11 | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 12              | 0.16                    | 0.15 | 0.15 | 0.13 | 0.12 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 13              | 0.15                    | 0.14 | 0.12 | 0.12 | 0.11 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 14              | 0.13                    | 0.13 | 0.10 | 0.10 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 15              | 0.13                    | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 16              | 0.10                    | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| TOTAL INFEEDE   | 3.82                    | 3.52 | 3.19 | 2.87 | 2.53 | 2.23 | 1.92 | 1.60 | 1.25 | 1.13 | 0.93 | 0.81 | 0.65 | 0.52 | 0.48 | 0.43 | 0.33 |  |

green background are standard items all other sizes can make specials

## W - External Whitworth threads

| TP              | 4                       | 4.5  | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 14   | 16   | 18   | 19   | 20   | 26   | 28   |  |
|-----------------|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|
| NO. OF INFEEDES | RADIAL INFEEDE PER PASS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |  |
| 1               | 0.49                    | 0.46 | 0.45 | 0.38 | 0.37 | 0.32 | 0.30 | 0.29 | 0.28 | 0.28 | 0.24 | 0.24 | 0.23 | 0.22 | 0.21 | 0.19 | 0.18 |  |
| 2               | 0.46                    | 0.43 | 0.43 | 0.36 | 0.35 | 0.30 | 0.28 | 0.27 | 0.26 | 0.26 | 0.22 | 0.22 | 0.22 | 0.22 | 0.21 | 0.18 | 0.17 |  |
| 3               | 0.38                    | 0.38 | 0.38 | 0.30 | 0.29 | 0.24 | 0.23 | 0.22 | 0.22 | 0.22 | 0.18 | 0.19 | 0.19 | 0.18 | 0.17 | 0.15 | 0.14 |  |
| 4               | 0.36                    | 0.33 | 0.32 | 0.26 | 0.25 | 0.21 | 0.20 | 0.19 | 0.19 | 0.18 | 0.15 | 0.16 | 0.16 | 0.14 | 0.14 | 0.12 | 0.12 |  |
| 5               | 0.34                    | 0.29 | 0.28 | 0.22 | 0.22 | 0.19 | 0.18 | 0.17 | 0.16 | 0.16 | 0.13 | 0.13 | 0.13 | 0.12 | 0.11 | 0.08 | 0.08 |  |
| 6               | 0.31                    | 0.25 | 0.25 | 0.21 | 0.19 | 0.17 | 0.15 | 0.15 | 0.14 | 0.14 | 0.11 | 0.11 | 0.08 | 0.08 | 0.08 | -    | -    |  |
| 7               | 0.29                    | 0.24 | 0.22 | 0.19 | 0.18 | 0.15 | 0.14 | 0.14 | 0.13 | 0.13 | 0.09 | 0.08 | -    | -    | -    | -    | -    |  |
| 8               | 0.27                    | 0.22 | 0.20 | 0.17 | 0.16 | 0.14 | 0.13 | 0.13 | 0.12 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    |  |
| 9               | 0.24                    | 0.20 | 0.19 | 0.16 | 0.15 | 0.13 | 0.12 | 0.12 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 10              | 0.22                    | 0.18 | 0.18 | 0.15 | 0.14 | 0.12 | 0.12 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 11              | 0.20                    | 0.17 | 0.17 | 0.14 | 0.12 | 0.12 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 12              | 0.19                    | 0.16 | 0.15 | 0.14 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 13              | 0.17                    | 0.15 | 0.12 | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 14              | 0.15                    | 0.14 | 0.10 | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 15              | 0.12                    | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 16              | 0.10                    | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| TOTAL INFEEDE   | 4.29                    | 3.82 | 3.44 | 2.90 | 2.50 | 2.17 | 1.93 | 1.76 | 1.58 | 1.45 | 1.20 | 1.13 | 1.01 | 0.96 | 0.92 | 0.72 | 0.69 |  |

green background are standard items all other sizes can make specials

A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES

G - SPARE PARTS

A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES

G - SPARE PARTS

UN - External UN threads

| TP              | 4                       | 4.5  | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   | 18   | 20   | 24   | 28   | 32   |
|-----------------|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| NO. OF INFEEDES | RADIAL INFEEDE PER PASS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 1               | 0.47                    | 0.45 | 0.43 | 0.36 | 0.35 | 0.30 | 0.28 | 0.27 | 0.27 | 0.27 | 0.25 | 0.23 | 0.22 | 0.23 | 0.20 | 0.19 | 0.17 | 0.17 |
| 2               | 0.44                    | 0.41 | 0.40 | 0.34 | 0.33 | 0.28 | 0.26 | 0.26 | 0.25 | 0.26 | 0.24 | 0.22 | 0.21 | 0.21 | 0.19 | 0.17 | 0.15 | 0.15 |
| 3               | 0.40                    | 0.39 | 0.36 | 0.27 | 0.26 | 0.25 | 0.21 | 0.20 | 0.20 | 0.20 | 0.18 | 0.17 | 0.16 | 0.16 | 0.15 | 0.14 | 0.11 | 0.13 |
| 4               | 0.36                    | 0.31 | 0.31 | 0.23 | 0.22 | 0.21 | 0.20 | 0.17 | 0.19 | 0.18 | 0.17 | 0.15 | 0.14 | 0.14 | 0.12 | 0.12 | 0.09 | 0.08 |
| 5               | 0.32                    | 0.26 | 0.26 | 0.22 | 0.21 | 0.18 | 0.17 | 0.16 | 0.16 | 0.15 | 0.14 | 0.13 | 0.13 | 0.12 | 0.10 | 0.08 | 0.08 | -    |
| 6               | 0.27                    | 0.23 | 0.23 | 0.20 | 0.19 | 0.16 | 0.15 | 0.15 | 0.14 | 0.13 | 0.12 | 0.11 | 0.11 | 0.08 | 0.08 | -    | -    | -    |
| 7               | 0.25                    | 0.21 | 0.20 | 0.18 | 0.17 | 0.14 | 0.14 | 0.14 | 0.12 | 0.12 | 0.11 | 0.10 | 0.08 | -    | -    | -    | -    | -    |
| 8               | 0.23                    | 0.20 | 0.19 | 0.16 | 0.15 | 0.13 | 0.12 | 0.12 | 0.11 | 0.08 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    |
| 9               | 0.22                    | 0.18 | 0.19 | 0.15 | 0.14 | 0.12 | 0.12 | 0.11 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 10              | 0.21                    | 0.17 | 0.18 | 0.14 | 0.12 | 0.12 | 0.11 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 11              | 0.19                    | 0.16 | 0.17 | 0.13 | 0.11 | 0.11 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 12              | 0.18                    | 0.15 | 0.15 | 0.12 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 13              | 0.16                    | 0.14 | 0.12 | 0.11 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 14              | 0.15                    | 0.14 | 0.10 | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 15              | 0.12                    | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 16              | 0.10                    | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| TOTAL INFEEDE   | 4.07                    | 3.62 | 3.29 | 2.71 | 2.33 | 2.08 | 1.84 | 1.66 | 1.52 | 1.39 | 1.29 | 1.19 | 1.05 | 0.94 | 0.84 | 0.70 | 0.60 | 0.53 |

green background are standard items all other sizes can make specials

NPT - External NPT threads


| TP              | 8                       | 11.5 | 14   | 18   | 27   |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------|-------------------------|------|------|------|------|--|--|--|--|--|--|--|--|--|--|--|--|--|
| NO. OF INFEEDES | RADIAL INFEEDE PER PASS |      |      |      |      |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 1               | 0.28                    | 0.25 | 0.24 | 0.22 | 0.19 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 2               | 0.25                    | 0.22 | 0.22 | 0.18 | 0.15 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3               | 0.22                    | 0.18 | 0.17 | 0.15 | 0.13 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 4               | 0.19                    | 0.16 | 0.15 | 0.14 | 0.11 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 5               | 0.18                    | 0.16 | 0.14 | 0.13 | 0.09 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6               | 0.18                    | 0.14 | 0.13 | 0.12 | 0.08 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 7               | 0.17                    | 0.14 | 0.12 | 0.10 | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 8               | 0.17                    | 0.12 | 0.10 | 0.08 | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 9               | 0.16                    | 0.12 | 0.10 | -    | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 10              | 0.16                    | 0.10 | 0.08 | -    | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 11              | 0.14                    | 0.09 | -    | -    | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 12              | 0.13                    | 0.08 | -    | -    | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 13              | 0.12                    | -    | -    | -    | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 14              | 0.11                    | -    | -    | -    | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 15              | 0.08                    | -    | -    | -    | -    |  |  |  |  |  |  |  |  |  |  |  |  |  |
| TOTAL INFEEDE   | 2.54                    | 1.76 | 1.45 | 1.12 | 0.75 |  |  |  |  |  |  |  |  |  |  |  |  |  |

green background are standard items all other sizes can make specials

BSPT - British tapered pipe threads

| TP              | 11                      | 14   | 19   | 28   |  |  |  |  |  |  |  |  |  |  |
|-----------------|-------------------------|------|------|------|--|--|--|--|--|--|--|--|--|--|
| NO. OF INFEEDES | RADIAL INFEEDE PER PASS |      |      |      |  |  |  |  |  |  |  |  |  |  |
| 1               | 0.25                    | 0.24 | 0.22 | 0.17 |  |  |  |  |  |  |  |  |  |  |
| 2               | 0.23                    | 0.20 | 0.19 | 0.14 |  |  |  |  |  |  |  |  |  |  |
| 3               | 0.21                    | 0.17 | 0.15 | 0.11 |  |  |  |  |  |  |  |  |  |  |
| 4               | 0.18                    | 0.14 | 0.12 | 0.10 |  |  |  |  |  |  |  |  |  |  |
| 5               | 0.16                    | 0.12 | 0.12 | 0.06 |  |  |  |  |  |  |  |  |  |  |
| 6               | 0.14                    | 0.12 | 0.06 | -    |  |  |  |  |  |  |  |  |  |  |
| 7               | 0.13                    | 0.11 | -    | -    |  |  |  |  |  |  |  |  |  |  |
| 8               | 0.12                    | 0.06 | -    | -    |  |  |  |  |  |  |  |  |  |  |
| 9               | 0.06                    | -    | -    | -    |  |  |  |  |  |  |  |  |  |  |
| TOTAL INFEEDE   | 1.58                    | 1.20 | 0.86 | 0.58 |  |  |  |  |  |  |  |  |  |  |

green background are standard items all other sizes can make specials

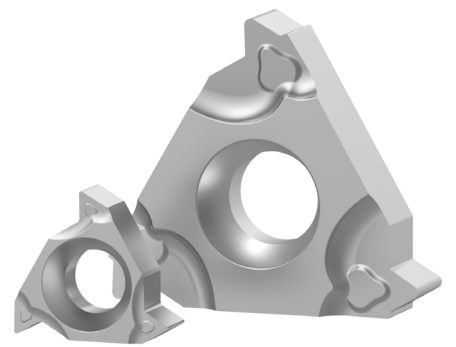

## THREADING Internal threads

Inserts Micro .B14

Holders Micro .B15

Inserts ISO 11 - 16 - 22 .B16

Holders ISO 11 - 16 - 22 .B21

Table "Number of passes" .B23

# Internal

ISO 11-16-22


- **M**: metric threads
- **W**: parallel pipe threads (whitworth)
- **UN**: unified inch threads
- **NPT**: American national tapered pipe threads
- **BSPT**: tapered pipe threads
- Partial profile with **55°** or **60°** angle, for metric, unified and parallel pipe threads

HF: Micrograin carbide  
BL: Low volume CBN  
DP: Polycrystalline diamond  
PVD: Physical vapour deposition

HF PVD  
HF PVD  
BL PVD  
DP  
**JP5120**  
**JP5125**  
**NBL350C**  
**ND050**

Stable machining, light cut ● 1<sup>st</sup> choice ○ suitable  
General machining, medium cut ● 1<sup>st</sup> choice ○ suitable  
Unstable machining, heavy cut ▲ 1<sup>st</sup> choice ▲ suitable

## Dimensions



## ISO

Vc(m/min) - suggested cutting speed range (bold: 1<sup>st</sup> choice)

|          |           |           |             |  |
|----------|-----------|-----------|-------------|--|
| <b>P</b> | 90<br>200 | 70<br>180 |             |  |
| <b>M</b> | 60<br>150 | 50<br>140 |             |  |
| <b>K</b> | 90<br>190 | 60<br>180 |             |  |
| <b>N</b> |           |           | 400<br>1600 |  |
| <b>S</b> |           |           | 50<br>100   |  |
| <b>H</b> |           | 60<br>140 |             |  |

## Designation

## Stock

| Designation           | RE   | TP   | PDX | PDY | IC    |   |   |  |  |
|-----------------------|------|------|-----|-----|-------|---|---|--|--|
| <b>16IR100ISO-TPM</b> | 0.07 | 1    | 0.7 | 0.8 | 9.525 | ● | ● |  |  |
| <b>16IR125ISO-TPM</b> | 0.09 | 1.25 | 0.9 | 0.8 | 9.525 | ● | ● |  |  |
| <b>16IR150ISO-TPM</b> | 0.11 | 1.5  | 1   | 0.8 | 9.525 | ● | ● |  |  |
| <b>16IR175ISO-TPM</b> | 0.13 | 1.75 | 1.2 | 1.2 | 9.525 | ● | ● |  |  |
| <b>16IR200ISO-TPM</b> | 0.15 | 2    | 1.3 | 1.2 | 9.525 | ● | ● |  |  |
| <b>16IR250ISO-TPM</b> | 0.18 | 2.5  | 1.5 | 1.2 | 9.525 | ● | ● |  |  |
| <b>16IR300ISO-TPM</b> | 0.22 | 3    | 1.5 | 1.2 | 9.525 | ● | ● |  |  |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▼ stock exhaustion

## FULL PROFILE



- Full profile insert will form a complete thread profile including the crest.
- The distance between root and crest is controlled.
- The insert can produce only one pitch.
- Higher tool pressure compared to partial profile.

## PRESSED VS GROUND

### TPM pressed

- Improves the chip control
- Strongly recommended in internal application especially for difficult materials
- Best cost-performance ratio

### Precision ground

- Achieves the higher precision
- A sharper cutting edge can guarantee very smooth cutting action
- Every kind of thread's standard can be easily produced using the same blank

|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                      |  |  |          |           |           |                                                                          |             |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|----------|-----------|-----------|--------------------------------------------------------------------------|-------------|--|--|
| Internal                                                                                                                                                                                                                                                                                                                                                                                        | HF: Micrograin carbide<br>BL: Low volume CBN<br>DP: Polycrystalline diamond<br>PVD: Physical vapour deposition                                                                                                                                                                       |  |  |          | HF<br>PVD | HF<br>PVD | BL<br>PVD                                                                | DP          |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | ISO 11-16-22                                                                                                                                                                                                                                                                         |  |  |          | JPS120    | JPS125    | NBL350C                                                                  | ND050       |  |  |
| <ul style="list-style-type: none"><li>• <b>M</b>: metric threads</li><li>• <b>W</b>: parallel pipe threads (whitwoth)</li><li>• <b>UN</b>: unified inch threads</li><li>• <b>NPT</b>: American national tapered pipe threads</li><li>• <b>BSPT</b>: tapered pipe threads</li><li>• Partial profile with <b>55°</b> or <b>60°</b> angle, for metric, unified and parallel pipe threads</li></ul> | Stable machining, light cut ● 1 <sup>st</sup> choice ○ suitable                                                                                                                                                                                                                      |  |  |          | ●         | ○         | ●                                                                        | ●           |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | General machining, medium cut ● 1 <sup>st</sup> choice ○ suitable                                                                                                                                                                                                                    |  |  |          | ●         | ●         |                                                                          |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | Unstable machining, heavy cut ▲ 1 <sup>st</sup> choice ▼ suitable                                                                                                                                                                                                                    |  |  |          | ▲         | ▼         |                                                                          |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | Dimensions                                                                                                                                                                                                                                                                           |  |  |          | ISO       |           | Vc(m/min) - suggested cutting speed range (bold: 1 <sup>st</sup> choice) |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | <div><div><div><div>RE</div><div>TP: thread pitch</div><div>PDY</div><div>PDX</div><div>S</div><div>D1</div><div>IC</div><div>3 edges</div></div><div><div>D1</div><div>S</div></div></div><div><div>111 3.18 3.20</div><div>161 3.65 4.00</div><div>221 4.71 5.00</div></div></div> |  |  |          | <b>P</b>  | 90<br>200 | 70<br>180                                                                |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                      |  |  | <b>M</b> | 60<br>150 | 50<br>140 |                                                                          |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                      |  |  | <b>K</b> | 90<br>190 | 60<br>180 |                                                                          |             |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                      |  |  | <b>N</b> |           |           |                                                                          | 400<br>1600 |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                      |  |  | <b>S</b> |           |           |                                                                          | 50<br>100   |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                      |  |  | <b>H</b> |           |           | 60<br>140                                                                |             |  |  |

|              |                                                                                                                                                                                                                      |             |       |      |     |     |       |  |   |  |  |  |       |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|------|-----|-----|-------|--|---|--|--|--|-------|
| FULL PROFILE | <div><div><div>M</div><div>P</div><div>M</div><div>K</div></div><div></div><div>precision ground<br/>sharpness oriented</div></div> | Designation | RE    | TP   | PDX | PDY | IC    |  |   |  |  |  | Stock |
|              |                                                                                                                                                                                                                      | 16IR100ISO  | 0.072 | 1    | 0.7 | 0.6 | 9.525 |  | ● |  |  |  |       |
|              |                                                                                                                                                                                                                      | 16IR125ISO  | 0.09  | 1.25 | 0.9 | 0.8 | 9.525 |  | ● |  |  |  |       |
|              |                                                                                                                                                                                                                      | 16IR150ISO  | 0.11  | 1.5  | 1   | 0.8 | 9.525 |  | ● |  |  |  |       |
|              |                                                                                                                                                                                                                      | 16IR175ISO  | 0.13  | 1.75 | 1.2 | 0.9 | 9.525 |  | ● |  |  |  |       |
|              |                                                                                                                                                                                                                      | 16IR200ISO  | 0.14  | 2    | 1.3 | 1   | 9.525 |  | ● |  |  |  |       |
|              |                                                                                                                                                                                                                      | 16IR250ISO  | 0.18  | 2.5  | 1.5 | 1.1 | 9.525 |  | ● |  |  |  |       |
|              |                                                                                                                                                                                                                      | 16IR300ISO  | 0.22  | 3    | 1.5 | 1.1 | 9.525 |  | ● |  |  |  |       |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▼ stock exhaustion

#### FULL PROFILE



- Full profile insert will form a complete thread profile including the crest.
- The distance between root and crest is controlled.
- The insert can produce only one pitch.
- Higher tool pressure compared to partial profile.

#### PRESSED VS GROUND

##### TPM pressed

- Improves the chip control
- Strongly recommended in internal application especially for difficult materials
- Best cost-performance ratio

##### Precision ground

- Achieves the higher precision
- A sharper cutting edge can guarantee very smooth cutting action
- Every kind of thread's standard can be easily produced using the same blank

# Internal

ISO 11-16-22


- **M**: metric threads
- **W**: parallel pipe threads (whitworth)
- **UN**: unified inch threads
- **NPT**: American national tapered pipe threads
- **BSPT**: tapered pipe threads
- Partial profile with **55°** or **60°** angle, for metric, unified and parallel pipe threads

HF: Micrograin carbide  
BL: Low volume CBN  
DP: Polycrystalline diamond  
PVD: Physical vapour deposition


HF PVD  
HF PVD  
BL PVD  
DP

**JP5120**  
**JP5125**  
**NBL350C**  
**ND050**

Stable machining, light cut  
General machining, medium cut  
Unstable machining, heavy cut



## Dimensions



ISO

Vc(m/min) - suggested cutting speed range (bold: 1<sup>st</sup> choice)

| P | 90<br>200 | 70<br>180 |             |  |
|---|-----------|-----------|-------------|--|
| M | 60<br>150 | 50<br>140 |             |  |
| K | 90<br>190 | 60<br>180 |             |  |
| N |           |           | 400<br>1600 |  |
| S |           |           | 50<br>100   |  |
| H |           | 60<br>140 |             |  |

## Designation

## Stock

| RE                  | TP            | PDX  | PDY  | IC  |     |       |   |   |   |
|---------------------|---------------|------|------|-----|-----|-------|---|---|---|
| <b>FULL PROFILE</b> |               |      |      |     |     |       |   |   |   |
| <b>M N</b><br>      | 16IR100ISO-1C | 0.08 | 1    | 0.7 | 0.8 | 9.525 |   |   | ● |
|                     | 16IR125ISO-1C | 0.09 | 1.25 | 0.9 |     | 9.525 |   |   | ● |
|                     | 16IR150ISO-1C | 0.11 | 1.5  | 1   |     | 9.525 |   |   | ● |
|                     | 16IR175ISO-1C | 0.13 | 1.75 | 1.2 |     | 9.525 |   |   | ● |
|                     | 16IR200ISO-1C | 0.15 | 2    | 1.3 |     | 9.525 |   |   | ● |
|                     | 16IR250ISO-1C | 0.18 | 2.5  | 1.5 |     | 9.525 |   |   | ● |
|                     | 16IR300ISO-1C | 0.22 | 3    | 1.5 |     | 9.525 |   |   | ● |
| <b>M H</b><br>      | 16IR100ISO-1S | 0.08 | 1    | 0.7 | 0.8 | 9.525 |   | ● |   |
|                     | 16IR125ISO-1S | 0.09 | 1.25 | 0.9 |     | 9.525 |   | ● |   |
|                     | 16IR150ISO-1S | 0.11 | 1.5  | 1   |     | 9.525 |   | ● |   |
|                     | 16IR175ISO-1S | 0.13 | 1.75 | 1.2 |     | 9.525 |   | ● |   |
|                     | 16IR200ISO-1S | 0.15 | 2    | 1.3 |     | 9.525 |   | ● |   |
|                     | 16IR250ISO-1S | 0.18 | 2.5  | 1.5 |     | 9.525 |   | ● |   |
|                     | 16IR300ISO-1S | 0.22 | 3    | 1.5 |     | 9.525 |   | ● |   |
| <b>W P M K</b><br>  | 16IR11W-TPM   | 0.3  | 11   | 1.5 | 1.2 | 9.525 | ● | ● |   |
|                     | 16IR14W-TPM   | 0.24 | 14   | 1.5 | 1.2 | 9.525 | ● | ● |   |
|                     | 16IR19W-TPM   | 0.17 | 19   | 1   | 0.8 | 9.525 |   | ● |   |
|                     |               |      |      |     |     |       |   |   |   |
| <b>UN P M K</b><br> | 16IR08UN-TPM  | 0.23 | 8    | 1.7 | 1.3 | 9.525 |   | ● |   |
|                     | 16IR12UN-TPM  | 0.16 | 12   | 1.5 | 1.2 | 9.525 |   | ● |   |
|                     | 16IR14UN-TPM  | 0.13 | 14   | 1.5 | 1.2 | 9.525 |   | ● |   |
|                     | 16IR16UN-TPM  | 0.12 | 16   | 1.1 | 0.9 | 9.525 |   | ● |   |
|                     | 16IR18UN-TPM  | 0.1  | 18   | 1   | 0.8 | 9.525 |   | ● |   |
|                     | 16IR20UN-TPM  | 0.09 | 20   | 0.9 | 0.8 | 9.525 |   | ● |   |
|                     | 16IR24UN-TPM  | 0.08 | 24   | 0.8 | 0.8 | 9.525 |   | ● |   |
|                     |               |      |      |     |     |       |   |   |   |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

## FULL PROFILE



- Full profile insert will form a complete thread profile including the crest.
- The distance between root and crest is controlled.
- The insert can produce only one pitch.
- Higher tool pressure compared to partial profile.

## ADVANCED THREADING



PCBN for ISO H

Please increase the number of passes when machining hardened steel with PCBN inserts. Keep the maximum infeed value lower than 0.10 mm

## PRESSED VS GROUND

### TPM pressed

- Improves the chip control
- Strongly recommended in internal application especially for difficult materials
- Best cost-performance ratio

### Precision ground

- Achieves the higher precision
- A sharper cutting edge can guarantee very smooth cutting action
- Every kind of thread's standard can be easily produced using the same blank

| Internal                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                     | HF: Micrograin carbide<br>BL: Low volume CBN<br>DP: Polycrystalline diamond<br>PVD: Physical vapour deposition | HF<br>PVD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | HF<br>PVD | BL<br>PVD                                                                | DP    |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------|-------|--|--|--|---|----|----|--|--|--|--|--|--|-----|-----|--|--|--|--|--|---|----|----|--|--|--|--|--|--|-----|-----|--|--|--|--|--|---|----|----|--|--|--|--|--|--|-----|-----|--|--|--|--|--|---|--|--|--|--|-----|--|--|--|--|--|--|--|------|--|--|---|--|--|--|--|----|--|--|--|--|--|--|--|-----|--|--|---|--|----|--|--|--|--|--|--|--|-----|--|--|--|--|
|                                                                                                                                                                                                                                                                                                                                                                                                 | ISO 11-16-22                                                                                                                                                                                                                                                        |                                                                                                                | JP5120                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | JP5125    | NBL350C                                                                  | ND050 |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
| <ul style="list-style-type: none"><li>• <b>M</b>: metric threads</li><li>• <b>W</b>: parallel pipe threads (whitwoth)</li><li>• <b>UN</b>: unified inch threads</li><li>• <b>NPT</b>: American national tapered pipe threads</li><li>• <b>BSPT</b>: tapered pipe threads</li><li>• Partial profile with <b>55°</b> or <b>60°</b> angle, for metric, unified and parallel pipe threads</li></ul> | Stable machining, light cut                                                                                                                                                                                                                                         | ● 1 <sup>st</sup> choice ○ suitable                                                                            | ●                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ○         | ●                                                                        | ●     |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | General machining, medium cut                                                                                                                                                                                                                                       | ● 1 <sup>st</sup> choice ○ suitable                                                                            | ●                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ●         |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | Unstable machining, heavy cut                                                                                                                                                                                                                                       | ⚙ 1 <sup>st</sup> choice ⚙ suitable                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ⚙         |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | Dimensions                                                                                                                                                                                                                                                          |                                                                                                                | ISO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |           | Vc(m/min) - suggested cutting speed range (bold: 1 <sup>st</sup> choice) |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | <div><div><div><div><div>RE</div><div>TP: thread pitch</div><div>PDY</div><div>PDX</div><div>S</div><div>D1</div><div>IC</div><div>3 edges</div></div><div></div></div><div><div>11 3.18 3.20</div><div>16 3.65 4.00</div><div>22 4.71 5.00</div></div></div></div> |                                                                                                                | <table><tr><td>P</td><td>90</td><td>70</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>200</td><td>180</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>M</td><td>60</td><td>50</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>150</td><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>K</td><td>90</td><td>60</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td>190</td><td>180</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>N</td><td></td><td></td><td></td><td></td><td>400</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>1600</td><td></td><td></td></tr><tr><td>S</td><td></td><td></td><td></td><td></td><td>50</td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>100</td><td></td><td></td></tr><tr><td>H</td><td></td><td>60</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td>140</td><td></td><td></td><td></td><td></td><td></td></tr></table> |           |                                                                          |       |  |  |  | P | 90 | 70 |  |  |  |  |  |  | 200 | 180 |  |  |  |  |  | M | 60 | 50 |  |  |  |  |  |  | 150 | 140 |  |  |  |  |  | K | 90 | 60 |  |  |  |  |  |  | 190 | 180 |  |  |  |  |  | N |  |  |  |  | 400 |  |  |  |  |  |  |  | 1600 |  |  | S |  |  |  |  | 50 |  |  |  |  |  |  |  | 100 |  |  | H |  | 60 |  |  |  |  |  |  |  | 140 |  |  |  |  |
| P                                                                                                                                                                                                                                                                                                                                                                                               | 90                                                                                                                                                                                                                                                                  | 70                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | 200                                                                                                                                                                                                                                                                 | 180                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
| M                                                                                                                                                                                                                                                                                                                                                                                               | 60                                                                                                                                                                                                                                                                  | 50                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | 150                                                                                                                                                                                                                                                                 | 140                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
| K                                                                                                                                                                                                                                                                                                                                                                                               | 90                                                                                                                                                                                                                                                                  | 60                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 | 190                                                                                                                                                                                                                                                                 | 180                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
| N                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                     |                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           | 400                                                                      |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                     |                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           | 1600                                                                     |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
| S                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                     |                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           | 50                                                                       |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                     |                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           | 100                                                                      |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
| H                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                     | 60                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                     | 140                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |           |                                                                          |       |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |    |    |  |  |  |  |  |  |     |     |  |  |  |  |  |   |  |  |  |  |     |  |  |  |  |  |  |  |      |  |  |   |  |  |  |  |    |  |  |  |  |  |  |  |     |  |  |   |  |    |  |  |  |  |  |  |  |     |  |  |  |  |

| Designation     |                                        | RE   | TP   | PDX | PDY | IC    | Stock |  |  |  |
|-----------------|----------------------------------------|------|------|-----|-----|-------|-------|--|--|--|
| FULL PROFILE    | NPT <b>P M K</b>                       |      |      |     |     |       |       |  |  |  |
|                 | 16IR11.5NPT-TPM                        | 0.25 | 11.5 | 1.5 | 1.2 | 9.525 | ●     |  |  |  |
|                 | 16IR14NPT-TPM                          | 0.22 | 14   | 1.5 | 1.2 | 9.525 | ●     |  |  |  |
|                 | TPM pressed type chip control oriented |      |      |     |     |       |       |  |  |  |
|                 | 16IR18NPT-TPM                          | 0.2  | 18   | 1   | 0.8 | 9.525 | ●     |  |  |  |
| FULL PROFILE    | NPT <b>P M K</b>                       |      |      |     |     |       |       |  |  |  |
|                 | 16IR11.5NPT                            | 0.07 | 11.5 | 1.5 | 1.1 | 9.525 | ●     |  |  |  |
|                 | 16IR14NPT                              | 0.06 | 14   | 1   | 0.8 | 9.525 | ●     |  |  |  |
|                 | precision ground sharpness oriented    |      |      |     |     |       |       |  |  |  |
| FULL PROFILE    | BSPT <b>P M K</b>                      |      |      |     |     |       |       |  |  |  |
|                 | 16IR11BSPT-TPM                         | 0.3  | 11   | 1.5 | 1.2 | 9.525 | ●     |  |  |  |
|                 | 16IR14BSPT-TPM                         | 0.24 | 14   | 1.5 | 1.2 | 9.525 | ●     |  |  |  |
|                 | 16IR19BSPT-TPM                         | 0.17 | 19   | 1   | 0.8 | 9.525 | ●     |  |  |  |
|                 | TPM pressed type chip control oriented |      |      |     |     |       |       |  |  |  |
|                 | 16IR28BSPT-TPM                         | 0.11 | 28   | 0.8 | 0.7 | 9.525 | ●     |  |  |  |
| PARTIAL PROFILE | 60° <b>P M K</b>                       |      |      |     |     |       |       |  |  |  |
|                 | 16IRAG0-TPM                            | 0.08 | -    | 0.9 | 0.8 | 9.525 | ●     |  |  |  |
|                 | 16IRAG60-TPM                           | 0.08 | -    | 1.5 | 1.1 | 9.525 | ●     |  |  |  |
|                 | 16IRG60-TPM                            | 0.13 | -    | 1.7 | 1.2 | 9.525 | ●     |  |  |  |
|                 | TPM pressed type chip control oriented |      |      |     |     |       |       |  |  |  |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

#### FULL PROFILE



- Full profile insert will form a complete thread profile including the crest.
- The distance between root and crest is controlled.
- The insert can produce only one pitch.
- Higher tool pressure compared to partial profile.

#### PRESSED VS GROUND

##### TPM pressed

- Improves the chip control
- Strongly recommended in internal application especially for difficult materials
- Best cost-performance ratio

##### Precision ground

- Achieves the higher precision
- A sharper cutting edge can guarantee very smooth cutting action
- Every kind of thread's standard can be easily produced using the same blank

#### PARTIAL PROFILE



- Partial profile insert works without cuts the outer diameter of the thread.
- The same insert can be used for a broad range of different thread pitches.
- Can produce burr that must be taken away.

#### PARTIAL PROFILE 60° PITCH RANGES

|      | M         | UN    |
|------|-----------|-------|
| A60  | 0.50÷1.50 | 48÷16 |
| AG60 | 0.50÷3.00 | 48÷8  |
| G60  | 1.75÷3.00 | 14÷8  |
| N60  | 3.50÷5.00 | 7÷5   |

# Internal

ISO 11-16-22

- **M**: metric threads
- **W**: parallel pipe threads (whitworth)
- **UN**: unified inch threads
- **NPT**: American national tapered pipe threads
- **BSPT**: tapered pipe threads
- Partial profile with **55°** or **60°** angle, for metric, unified and parallel pipe threads

HF: Micrograin carbide  
BL: Low volume CBN  
DP: Polycrystalline diamond  
PVD: Physical vapour deposition

HF PVD  
HF PVD  
BL PVD  
DP


**JP5120**  
**JP5125**  
**NBL350C**  
**ND050**

Stable machining, light cut ● 1<sup>st</sup> choice ○ suitable  
General machining, medium cut ● 1<sup>st</sup> choice ○ suitable  
Unstable machining, heavy cut ⚙ 1<sup>st</sup> choice ⚙ suitable

## Dimensions

ISO

Vc(m/min) - suggested cutting speed range (bold: 1<sup>st</sup> choice)



|          |           |           |             |  |
|----------|-----------|-----------|-------------|--|
| <b>P</b> | 90<br>200 | 70<br>180 |             |  |
| <b>M</b> | 60<br>150 | 50<br>140 |             |  |
| <b>K</b> | 90<br>190 | 60<br>180 |             |  |
| <b>N</b> |           |           | 400<br>1600 |  |
| <b>S</b> |           |           | 50<br>100   |  |
| <b>H</b> |           | 60<br>140 |             |  |

## Designation

RE

TP

PDX

PDY

IC

## Stock



16IRA55-TPM

0.08

-

0.9

0.8

9.525

●

16IRAG55-TPM

0.08

-

1.5

1.1

9.525

●

16IRG55-TPM

0.21

-

1.7

1.2

9.525

●

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

## PARTIAL PROFILE



- Partial profile insert works without cuts the outer diameter of the thread.
- The same insert can be used for a broad range of different thread pitches.
- Can produce burr that must be taken away.

## PARTIAL PROFILE 55° PITCH RANGES



|             | BSW-BSF-BSP |
|-------------|-------------|
| <b>A55</b>  | 48÷16       |
| <b>AG55</b> | 48÷8        |
| <b>G55</b>  | 14÷8        |
| <b>N55</b>  | 7÷5         |

|                                                                                                                                                                                                                                      |                                                |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|--|
| <h2>V SI</h2> <h3>ISO 11-16-22</h3> <ul style="list-style-type: none"> <li>Internal threading holder</li> <li>Vortex boring bar (High standard steel)</li> <li>Special chip evacuation path</li> <li>With coolant through</li> </ul> | <p>Reduced neck</p> <p>Right-hand shown</p>    |  |
|                                                                                                                                                                                                                                      | <p>Standard design</p> <p>Right-hand shown</p> |  |

| Designation      | Stock<br>L R | DMIN | DCON | WF   | LF  | LH | GAMO |  |  |  | MIID                |
|------------------|--------------|------|------|------|-----|----|------|--|--|--|---------------------|
| REDUCED NECK     |              |      |      |      |     |    |      |  |  |  |                     |
| NT-V16M-SIR11-12 | ●            | 12   | 16   | 6.3  | 150 | 25 | 18°  |  |  |  | 11IR <sub>000</sub> |
| NT-V16M-SIR11-15 | ●            | 15   | 16   | 7.5  | 150 | 25 | 18°  |  |  |  | 11IR <sub>000</sub> |
| STANDARD DESIGN  |              |      |      |      |     |    |      |  |  |  |                     |
| NT-V10M-SIR11-10 | ●            | 10   | 10   | 5.2  | 150 | 25 | 21°  |  |  |  | 11IR <sub>000</sub> |
| NT-V16M-SIR16-20 | ●            | 20   | 16   | 10   | 150 | 35 | 15°  |  |  |  | 16IR <sub>000</sub> |
| NT-V20Q-SIR16-24 | ●            | 24   | 20   | 12   | 180 | 35 | 15°  |  |  |  | 16IR <sub>000</sub> |
| NT-V25R-SIR16-30 | ●            | 30   | 25   | 15   | 200 | 35 | 15°  |  |  |  | 16IR <sub>000</sub> |
| NT-V32S-SIR16-37 | ●            | 37   | 32   | 18.5 | 250 | 35 | 15°  |  |  |  | 16IR <sub>000</sub> |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

| Spare parts                               | Shim     | Locking screws | L wrench | Insert screws | Flag wrenches |
|-------------------------------------------|----------|----------------|----------|---------------|---------------|
| NT-V <sub>00</sub> M-SIR11- <sub>00</sub> | -        | -              | -        | NT-ST25059T08 | NT-FT08       |
| NT-V16M-SIR16-20                          | -        | -              | -        | NT-ST35089T15 | NT-FT15       |
| NT-V20Q-SIR16-24                          | NT-SH065 | NT-SC003       | NT-WR025 | NT-ST35120T15 | NT-FT15       |
| NT-V25R-SIR16-30                          | NT-SH065 | NT-SC003       | NT-WR025 | NT-ST35120T15 | NT-FT15       |
| NT-V32S-SIR16-37                          | NT-SH065 | NT-SC003       | NT-WR025 | NT-ST35120T15 | NT-FT15       |





## SI

### ISO 11-16-22

- Internal threading holder
- Steel boring bar
- Without coolant through
- Small diameters with reduced neck



Reduced neck

Right-hand shown

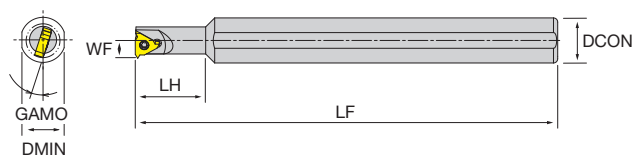

Standard design





Right-hand shown

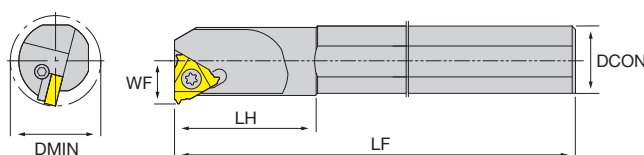

| Designation     | Stock |   | DMIN | DCON | WF   | LF  | LH | GAMO |  |  |  | MIID                  |
|-----------------|-------|---|------|------|------|-----|----|------|--|--|--|-----------------------|
|                 | L     | R |      |      |      |     |    |      |  |  |  |                       |
| REDUCED NECK    |       |   |      |      |      |     |    |      |  |  |  |                       |
| NT-SIR1012-11   |       | ● | 10   | 12   | 5.2  | 150 | 25 | 21°  |  |  |  | 11IR <sup>000</sup>   |
| NT-SIR1216-11   |       | ● | 12   | 16   | 6.3  | 150 | 25 | 18°  |  |  |  | 11IR <sup>000</sup>   |
| NT-SIR1516-11   |       | ● | 15   | 16   | 7.5  | 150 | 25 | 15°  |  |  |  | 11IR <sup>000</sup>   |
| STANDARD DESIGN |       |   |      |      |      |     |    |      |  |  |  |                       |
| NT-SIR2016-16   | ●     | ● | 20   | 16   | 10   | 150 | 35 | 15°  |  |  |  | 16IL/R <sup>000</sup> |
| NT-SIR2420S-16  | ●     | ● | 24   | 20   | 12   | 180 | 35 | 15°  |  |  |  | 16IL/R <sup>000</sup> |
| NT-SIR3025S-16  | ●     | ● | 30   | 25   | 15   | 200 | 35 | 15°  |  |  |  | 16IL/R <sup>000</sup> |
| NT-SIR3732S-16  | ●     | ● | 37   | 32   | 18.5 | 250 | 35 | 15°  |  |  |  | 16IL/R <sup>000</sup> |
| NT-SIR3025S-22  |       | ● | 30   | 25   | 16   | 200 | 35 | 15°  |  |  |  | 22IR <sup>000</sup>   |
| NT-SIR3732S-22  |       | ● | 37   | 32   | 19.5 | 250 | 35 | 15°  |  |  |  | 22IR <sup>000</sup>   |
| NT-SIR4440S-22  |       | ● | 44   | 40   | 24.5 | 300 | 35 | 15°  |  |  |  | 22IR <sup>000</sup>   |

● stock standard, ○ non-standard stock, ▲ upcoming introduction, ▽ stock exhaustion

| Spare parts                 | Shim     | Shim     | Locking screws | L wrench | Insert screws | Flag wrenches |
|-----------------------------|----------|----------|----------------|----------|---------------|---------------|
| NT-SIR <sup>0000</sup> -11  | -        | -        | -              | -        | NT-ST25059T08 | NT-FT08       |
| NT-SIR <sup>0000</sup> -16  | -        | -        | -              | -        | NT-ST35089T15 | NT-FT15       |
|                             | NT-SH060 |          |                |          |               |               |
| NT-SIR <sup>0000</sup> S-16 | -        | NT-SH065 | NT-SC003       | NT-WR025 | NT-ST35115T15 | NT-FT15       |
| NT-SIR <sup>0000</sup> S-22 | -        | NT-SH067 | NT-SC004       | NT-WR030 | NT-ST40140T15 | NT-FT15       |



## M - Internal ISO-metric threads

| TP              | 6.00                    | 5.50 | 5.00 | 4.50 | 4.00 | 3.50 | 3.00 | 2.50 | 2.00 | 1.75 | 1.50 | 1.25 | 1.00 | 0.80 | 0.75 | 0.70 | 0.50 |  |
|-----------------|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|
| NO. OF INFEEDES | RADIAL INFEEDE PER PASS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |  |
| 1               | 0.46                    | 0.43 | 0.42 | 0.37 | 0.34 | 0.32 | 0.28 | 0.26 | 0.23 | 0.22 | 0.20 | 0.17 | 0.17 | 0.17 | 0.16 | 0.13 | 0.10 |  |
| 2               | 0.43                    | 0.40 | 0.40 | 0.34 | 0.31 | 0.30 | 0.26 | 0.25 | 0.21 | 0.20 | 0.18 | 0.17 | 0.15 | 0.14 | 0.13 | 0.12 | 0.08 |  |
| 3               | 0.35                    | 0.33 | 0.32 | 0.28 | 0.24 | 0.24 | 0.21 | 0.18 | 0.17 | 0.15 | 0.15 | 0.14 | 0.11 | 0.11 | 0.10 | 0.10 | 0.07 |  |
| 4               | 0.30                    | 0.26 | 0.26 | 0.23 | 0.21 | 0.19 | 0.16 | 0.15 | 0.15 | 0.13 | 0.13 | 0.10 | 0.09 | 0.07 | 0.07 | 0.07 | 0.06 |  |
| 5               | 0.26                    | 0.22 | 0.22 | 0.21 | 0.18 | 0.17 | 0.14 | 0.13 | 0.12 | 0.10 | 0.11 | 0.09 | 0.08 | -    | -    | -    | -    |  |
| 6               | 0.22                    | 0.20 | 0.20 | 0.19 | 0.15 | 0.15 | 0.13 | 0.12 | 0.11 | 0.09 | 0.08 | 0.08 | -    | -    | -    | -    | -    |  |
| 7               | 0.20                    | 0.18 | 0.17 | 0.16 | 0.14 | 0.14 | 0.12 | 0.11 | 0.10 | 0.08 | -    | -    | -    | -    | -    | -    | -    |  |
| 8               | 0.19                    | 0.17 | 0.16 | 0.15 | 0.13 | 0.13 | 0.11 | 0.10 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    |  |
| 9               | 0.18                    | 0.16 | 0.16 | 0.14 | 0.12 | 0.12 | 0.10 | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 10              | 0.16                    | 0.15 | 0.15 | 0.13 | 0.12 | 0.11 | 0.10 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 11              | 0.15                    | 0.14 | 0.14 | 0.12 | 0.11 | 0.10 | 0.09 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 12              | 0.15                    | 0.14 | 0.14 | 0.12 | 0.10 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 13              | 0.14                    | 0.13 | 0.12 | 0.11 | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 14              | 0.13                    | 0.12 | 0.10 | 0.10 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 15              | 0.12                    | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 16              | 0.10                    | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| TOTAL INFEEDE   | 3.54                    | 3.25 | 2.96 | 2.65 | 2.33 | 2.05 | 1.78 | 1.48 | 1.17 | 1.05 | 0.85 | 0.75 | 0.60 | 0.49 | 0.46 | 0.42 | 0.31 |  |

green background are standard items all other sizes can make specials

## W - Internal Whitworth threads

| TP              | 4                       | 4.5  | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 14   | 16   | 18   | 19   | 20   | 26   | 28   |  |
|-----------------|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|
| NO. OF INFEEDES | RADIAL INFEEDE PER PASS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |  |
| 1               | 0.49                    | 0.46 | 0.45 | 0.38 | 0.37 | 0.32 | 0.30 | 0.29 | 0.28 | 0.28 | 0.24 | 0.24 | 0.23 | 0.22 | 0.21 | 0.19 | 0.18 |  |
| 2               | 0.46                    | 0.43 | 0.43 | 0.36 | 0.35 | 0.30 | 0.28 | 0.27 | 0.26 | 0.26 | 0.22 | 0.22 | 0.22 | 0.22 | 0.21 | 0.18 | 0.17 |  |
| 3               | 0.38                    | 0.38 | 0.38 | 0.30 | 0.29 | 0.24 | 0.23 | 0.22 | 0.22 | 0.22 | 0.18 | 0.19 | 0.19 | 0.18 | 0.17 | 0.15 | 0.14 |  |
| 4               | 0.36                    | 0.33 | 0.32 | 0.26 | 0.25 | 0.21 | 0.20 | 0.19 | 0.19 | 0.18 | 0.15 | 0.16 | 0.16 | 0.14 | 0.14 | 0.12 | 0.12 |  |
| 5               | 0.34                    | 0.29 | 0.28 | 0.22 | 0.22 | 0.19 | 0.18 | 0.17 | 0.16 | 0.16 | 0.13 | 0.13 | 0.13 | 0.12 | 0.11 | 0.08 | 0.08 |  |
| 6               | 0.31                    | 0.25 | 0.25 | 0.21 | 0.19 | 0.17 | 0.15 | 0.15 | 0.14 | 0.14 | 0.11 | 0.11 | 0.08 | 0.08 | 0.08 | -    | -    |  |
| 7               | 0.29                    | 0.24 | 0.22 | 0.19 | 0.18 | 0.15 | 0.14 | 0.14 | 0.13 | 0.13 | 0.09 | 0.08 | -    | -    | -    | -    | -    |  |
| 8               | 0.27                    | 0.22 | 0.20 | 0.17 | 0.16 | 0.14 | 0.13 | 0.13 | 0.12 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    |  |
| 9               | 0.24                    | 0.20 | 0.19 | 0.16 | 0.15 | 0.13 | 0.12 | 0.12 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 10              | 0.22                    | 0.18 | 0.18 | 0.15 | 0.14 | 0.12 | 0.12 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 11              | 0.20                    | 0.17 | 0.17 | 0.14 | 0.12 | 0.12 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 12              | 0.19                    | 0.16 | 0.15 | 0.14 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 13              | 0.17                    | 0.15 | 0.12 | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 14              | 0.15                    | 0.14 | 0.10 | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 15              | 0.12                    | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| 16              | 0.10                    | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |  |
| TOTAL INFEEDE   | 4.29                    | 3.82 | 3.44 | 2.90 | 2.50 | 2.17 | 1.93 | 1.76 | 1.58 | 1.45 | 1.20 | 1.13 | 1.01 | 0.96 | 0.92 | 0.72 | 0.69 |  |

green background are standard items all other sizes can make specials

A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES

G - SPARE PARTS

## UN - Internal UN threads

| TP              | 4                       | 4.5  | 5    | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   | 18   | 20   | 24   | 28   | 32   |
|-----------------|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| NO. OF INFEEDES | RADIAL INFEEED PER PASS |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 1               | 0.44                    | 0.41 | 0.42 | 0.35 | 0.34 | 0.30 | 0.28 | 0.27 | 0.27 | 0.27 | 0.25 | 0.23 | 0.22 | 0.23 | 0.20 | 0.18 | 0.17 | 0.17 |
| 2               | 0.41                    | 0.38 | 0.38 | 0.33 | 0.32 | 0.28 | 0.26 | 0.25 | 0.23 | 0.23 | 0.20 | 0.18 | 0.18 | 0.17 | 0.16 | 0.15 | 0.14 | 0.14 |
| 3               | 0.39                    | 0.34 | 0.33 | 0.25 | 0.24 | 0.22 | 0.19 | 0.18 | 0.18 | 0.18 | 0.15 | 0.14 | 0.14 | 0.14 | 0.13 | 0.13 | 0.09 | 0.10 |
| 4               | 0.33                    | 0.28 | 0.27 | 0.21 | 0.21 | 0.18 | 0.16 | 0.15 | 0.15 | 0.15 | 0.13 | 0.13 | 0.12 | 0.12 | 0.10 | 0.10 | 0.08 | 0.08 |
| 5               | 0.28                    | 0.23 | 0.23 | 0.18 | 0.17 | 0.15 | 0.14 | 0.13 | 0.13 | 0.13 | 0.12 | 0.11 | 0.10 | 0.10 | 0.09 | 0.08 | 0.08 | -    |
| 6               | 0.24                    | 0.20 | 0.20 | 0.16 | 0.15 | 0.13 | 0.13 | 0.12 | 0.11 | 0.11 | 0.11 | 0.10 | 0.09 | 0.08 | 0.08 | -    | -    | -    |
| 7               | 0.22                    | 0.19 | 0.18 | 0.15 | 0.14 | 0.12 | 0.12 | 0.11 | 0.11 | 0.10 | 0.10 | 0.09 | 0.08 | -    | -    | -    | -    | -    |
| 8               | 0.21                    | 0.18 | 0.17 | 0.14 | 0.13 | 0.11 | 0.11 | 0.10 | 0.10 | 0.08 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    |
| 9               | 0.20                    | 0.17 | 0.16 | 0.13 | 0.12 | 0.11 | 0.10 | 0.10 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 10              | 0.18                    | 0.16 | 0.15 | 0.12 | 0.12 | 0.10 | 0.09 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 11              | 0.17                    | 0.15 | 0.14 | 0.12 | 0.11 | 0.10 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 12              | 0.16                    | 0.14 | 0.14 | 0.11 | 0.08 | 0.08 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 13              | 0.15                    | 0.14 | 0.12 | 0.11 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 14              | 0.14                    | 0.13 | 0.10 | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 15              | 0.12                    | 0.12 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| 16              | 0.10                    | 0.10 | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
| TOTAL INFEEED   | 3.74                    | 3.32 | 2.99 | 2.46 | 2.13 | 1.88 | 1.66 | 1.49 | 1.36 | 1.25 | 1.14 | 1.06 | 0.93 | 0.84 | 0.76 | 0.64 | 0.56 | 0.49 |

green background are standard items all other sizes can make specials

## NPT - Internal NPT threads

| TP              | 8                       | 11.5 | 14   | 18   | 27.0 |  |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------|-------------------------|------|------|------|------|--|--|--|--|--|--|--|--|--|--|--|--|--|
| NO. OF INFEEDES | RADIAL INFEEED PER PASS |      |      |      |      |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 1               | 0.28                    | 0.28 | 0.28 | 0.28 | 0.28 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 2               | 0.25                    | 0.25 | 0.25 | 0.25 | 0.25 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 3               | 0.22                    | 0.22 | 0.22 | 0.22 | 0.22 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 4               | 0.19                    | 0.19 | 0.19 | 0.19 | 0.19 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 5               | 0.18                    | 0.18 | 0.18 | 0.18 | 0.18 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6               | 0.18                    | 0.18 | 0.18 | 0.18 | 0.18 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 7               | 0.17                    | 0.17 | 0.17 | 0.17 | 0.17 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 8               | 0.17                    | 0.17 | 0.17 | 0.17 | 0.17 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 9               | 0.16                    | 0.16 | 0.16 | 0.16 | 0.16 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 10              | 0.16                    | 0.16 | 0.16 | 0.16 | 0.16 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 11              | 0.14                    | 0.14 | 0.14 | 0.14 | 0.14 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 12              | 0.13                    | 0.13 | 0.13 | 0.13 | 0.13 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 13              | 0.12                    | 0.12 | 0.12 | 0.12 | 0.12 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 14              | 0.11                    | 0.11 | 0.11 | 0.11 | 0.11 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 15              | 0.08                    | 0.08 | 0.08 | 0.08 | 0.08 |  |  |  |  |  |  |  |  |  |  |  |  |  |
| TOTAL INFEEED   | 2.54                    | 1.76 | 1.45 | 1.12 | 0.75 |  |  |  |  |  |  |  |  |  |  |  |  |  |

green background are standard items all other sizes can make specials

## BSPT - British tapered pipe threads

| TP              | 11                      | 14   | 19   | 28   |  |  |  |  |  |  |  |  |  |  |
|-----------------|-------------------------|------|------|------|--|--|--|--|--|--|--|--|--|--|
| NO. OF INFEEDES | RADIAL INFEEED PER PASS |      |      |      |  |  |  |  |  |  |  |  |  |  |
| 1               | 0.25                    | 0.24 | 0.22 | 0.17 |  |  |  |  |  |  |  |  |  |  |
| 2               | 0.23                    | 0.20 | 0.19 | 0.14 |  |  |  |  |  |  |  |  |  |  |
| 3               | 0.21                    | 0.17 | 0.15 | 0.11 |  |  |  |  |  |  |  |  |  |  |
| 4               | 0.18                    | 0.14 | 0.12 | 0.10 |  |  |  |  |  |  |  |  |  |  |
| 5               | 0.16                    | 0.12 | 0.12 | 0.06 |  |  |  |  |  |  |  |  |  |  |
| 6               | 0.14                    | 0.12 | 0.06 | -    |  |  |  |  |  |  |  |  |  |  |
| 7               | 0.13                    | 0.11 | -    | -    |  |  |  |  |  |  |  |  |  |  |
| 8               | 0.12                    | 0.06 | -    | -    |  |  |  |  |  |  |  |  |  |  |
| 9               | 0.06                    | -    | -    | -    |  |  |  |  |  |  |  |  |  |  |
| TOTAL INFEEED   | 1.58                    | 1.20 | 0.86 | 0.58 |  |  |  |  |  |  |  |  |  |  |

green background are standard items all other sizes can make specials

| ISO 513        | MATERIAL                                                                                   | HARDNESS<br>HB | JP5120            |            |            | JP5125                |                   |                   |  |
|----------------|--------------------------------------------------------------------------------------------|----------------|-------------------|------------|------------|-----------------------|-------------------|-------------------|--|
|                |                                                                                            |                | min               | start      | max        | min                   | start             | max               |  |
| <b>P1 - P2</b> | Free cutting steel and low carbon<br>(ex. 1.0715/9 smn 28/avp, 1.0503/c45)                 | ≤ 200          | ● 100<br>● 90     | 150<br>130 | 200<br>170 | ○ 100<br>● 80<br>⚙ 70 | 140<br>120<br>100 | 180<br>160<br>130 |  |
| <b>P3 - P4</b> | Medium and high alloy steel<br>(ex. 1.7225/42 CrMo 4, 1.3505/100 Cr 6)                     | 200 ÷ 300      | ● 90<br>● 80      | 130<br>110 | 170<br>140 | ○ 80<br>● 70<br>⚙ 60  | 120<br>100<br>80  | 160<br>120<br>100 |  |
| <b>P5 - P6</b> | High tensile strength and tool steel<br>(ex. 1.2344/X 40 CrMoV 5 1/ORVAR, Hardox400®)      | 300 ÷ 400      | ● 80<br>● 70      | 110<br>100 | 150<br>130 | ○ 70<br>● 60<br>⚙ 60  | 100<br>90<br>80   | 130<br>120<br>100 |  |
| <b>P7</b>      | Ferritic and martensitic stainless steel<br>(ex. 1.4021/X 20 Cr 13/AISI420)                | ≤ 200          | ● 100<br>● 90     | 150<br>130 | 200<br>170 | ○ 100<br>● 80<br>⚙ 70 | 140<br>120<br>100 | 180<br>160<br>130 |  |
| <b>P8</b>      | Precipitation hardening stainless steel<br>(ex. 1.4548/X 5 CrNiCuNb 17 4/17-4-PH)          | ≤ 450          | ● 70<br>● 60      | 90<br>80   | 110<br>100 | ○ 60<br>● 50<br>⚙ 50  | 80<br>70<br>60    | 100<br>90<br>70   |  |
| <b>M1</b>      | Austenitic stainless steel<br>(ex. 1.4305/X 10 CrNiS 18 9/AISI303)                         | > 200          | ● 70<br>● 60      | 110<br>100 | 150<br>140 | ○ 60<br>● 50<br>⚙ 50  | 100<br>90<br>80   | 140<br>130<br>110 |  |
| <b>M2 - M3</b> | Austenitic and Duplex stainless steel<br>(ex. 1.4401/X 5 CrNiMo 17 12 2/AISI316)           |                | ● 70<br>● 60      | 100<br>90  | 130<br>120 | ○ 60<br>● 60<br>⚙ 50  | 90<br>80<br>70    | 120<br>100<br>90  |  |
| <b>K1</b>      | Grey cast iron<br>(ex. 0.6025/GG 25/EN-GJL-250)                                            | 150 ÷ 250      | ● 110<br>● 90     | 150<br>135 | 190<br>160 | ○ 100<br>● 80<br>⚙ 60 | 140<br>115<br>90  | 180<br>150<br>120 |  |
| <b>K2</b>      | Nodular cast iron<br>(ex. 0.7050/GGG 50/EN-GJS-500-7)                                      | 150 ÷ 350      | ● 90<br>● 80      | 130<br>105 | 170<br>130 | ○ 80<br>● 70<br>⚙ 60  | 120<br>95<br>80   | 160<br>120<br>100 |  |
| <b>K3 - K4</b> | Austenitic and ADI cast iron<br>(ex. 0.6660/GGL-NiCr 20 2/Ni-Resist 2, GJS-1000-5/ADI1000) | 250 ÷ 500      | ● 80<br>● 70      | 115<br>100 | 150<br>130 | ○ 70<br>● 60<br>⚙ 50  | 105<br>90<br>75   | 140<br>120<br>100 |  |
| ISO 513        | MATERIAL                                                                                   | HARDNESS<br>HB | ND050<br>(NDP001) |            |            |                       |                   |                   |  |
|                |                                                                                            |                | min               | start      | max        |                       |                   |                   |  |
| <b>N1</b>      | Aluminium alloys ≤ Si 12%<br>(ex. 3.4365/AlZn5.5MgCu/ERGA)                                 |                | ● 400             | 1000       | 1600       |                       |                   |                   |  |
| <b>N2</b>      | Aluminium alloys Si > 12%<br>(ex. 3.2382/G-AlSi12)                                         |                | ● 250             | 400        | 550        |                       |                   |                   |  |
| <b>N3</b>      | Copper alloy<br>(ex. 2.0060/E-Cu57)                                                        |                | ● 300             | 600        | 900        |                       |                   |                   |  |
| <b>S4 - S5</b> | Titanium alloys<br>(ex. TiAl2Sn4Zr2MoSi)                                                   |                | ● 50              | 75         | 100        |                       |                   |                   |  |

Complete workpiece materials p. H1.

A - TURNING

B - THREADING

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES

G - SPARE PARTS

|               |         |                                                                     |                |         |       |     |  |  |
|---------------|---------|---------------------------------------------------------------------|----------------|---------|-------|-----|--|--|
| A - TURNING   | ISO 513 | MATERIAL                                                            | HARDNESS<br>HB | NBL350C |       |     |  |  |
|               |         |                                                                     |                | min     | start | max |  |  |
|               | H1      | Case-hardened steel<br>(ex. 1.7131/16 MnCr 5)                       | 50 ÷ 56        | ● 60    | 100   | 140 |  |  |
| B - THREADING | H2      | Bearing steel, quenched and tempered steel<br>(ex. 1.3505/100 Cr 6) | 54 ÷ 62        | ● 60    | 90    | 120 |  |  |
|               | H3      | Hardened tool steel<br>(ex. 1.2436/X 210 CrW 12/2312)               | 60 ÷ 65        | ● 50    | 70    | 90  |  |  |

Complete workpiece materials p. H1.

C - GROOVING

D - MILLING

E - DRILLING

F - ACCESSORIES

G - SPARE PARTS